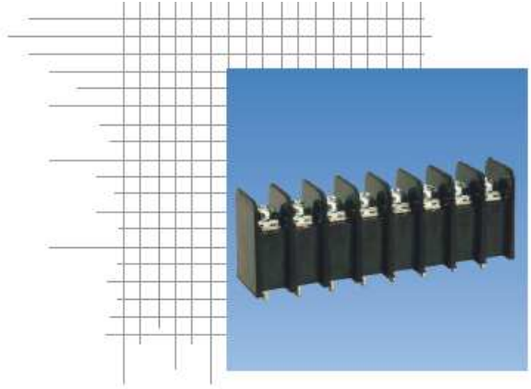

BARRIER
TERMINAL BLOCK

TYPE BTB550

SPECIFICATIONS

WIRE ENTRANCE: .....Parallel to PCB
CENTER SPACING: 11.125mm
WIRE RANGE: .....10--24 AWG
ELECTRICAL RATING: 300V, 20A
BREAKDOWN VOLTAGE: 4,000V
MOLDING: .....Thermoplastic,
UL94, V-0
Self Extinguishing

MAX. TORQUE: .....13 lb-in.
SCREW: ..... M4, Brass, Ni Plated
TERMINAL : .....Brass, Tin Plated
TEMPERATURE:
OPERATING: .....-40°C to +120°C
-40°F to + 248°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

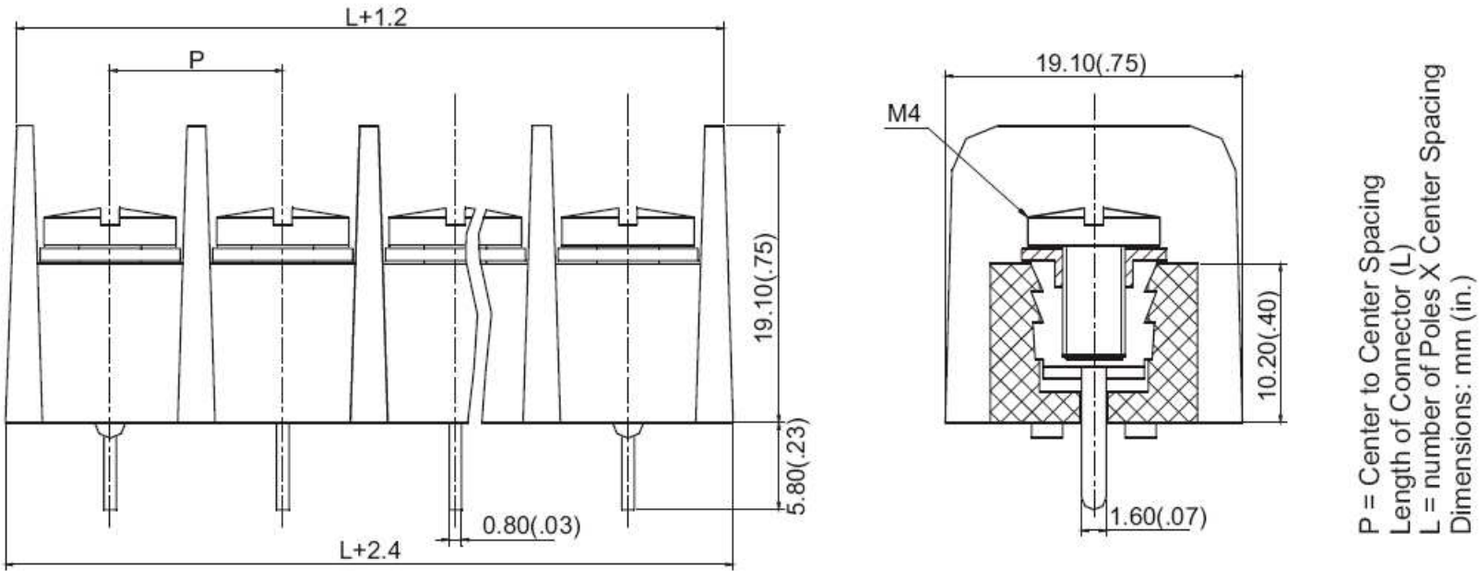

ORDERING INFORMATION

BTB550 — 0 3 — □ □ — □ — □ □

Style	Poles	Color	Options*
00 to 99	02 to 19	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).