BARRIER
TERMINAL BLOCK

TYPE BTB555

SPECIFICATIONS

WIRE ENTRANCE:	Vertical to PCB
CENTER SPACING:	8.255mm / 0.325 in
WIRE RANGE:	12--26 AWG
ELECTRICAL RATING:	300V, 20A
BREAKDOWN VOLTAGE:	4,000V
MOLDING:	Thermoplastic, UI94 V-0, Self Extinguishing
MAX. TORQUE:	7 lb-in.
PRESSURE PLATE:	Steel, Ni Plated
SCREW:	M3, Steel, Ni Plated
TERMINAL:	Brass, Tin Plated
OPERATING:	-40°C to +120°C -40°F to + 248°F
MAX. SOLDERING:	260°C , +500°F for 5 seconds

MECHANICAL DIMENSIONS

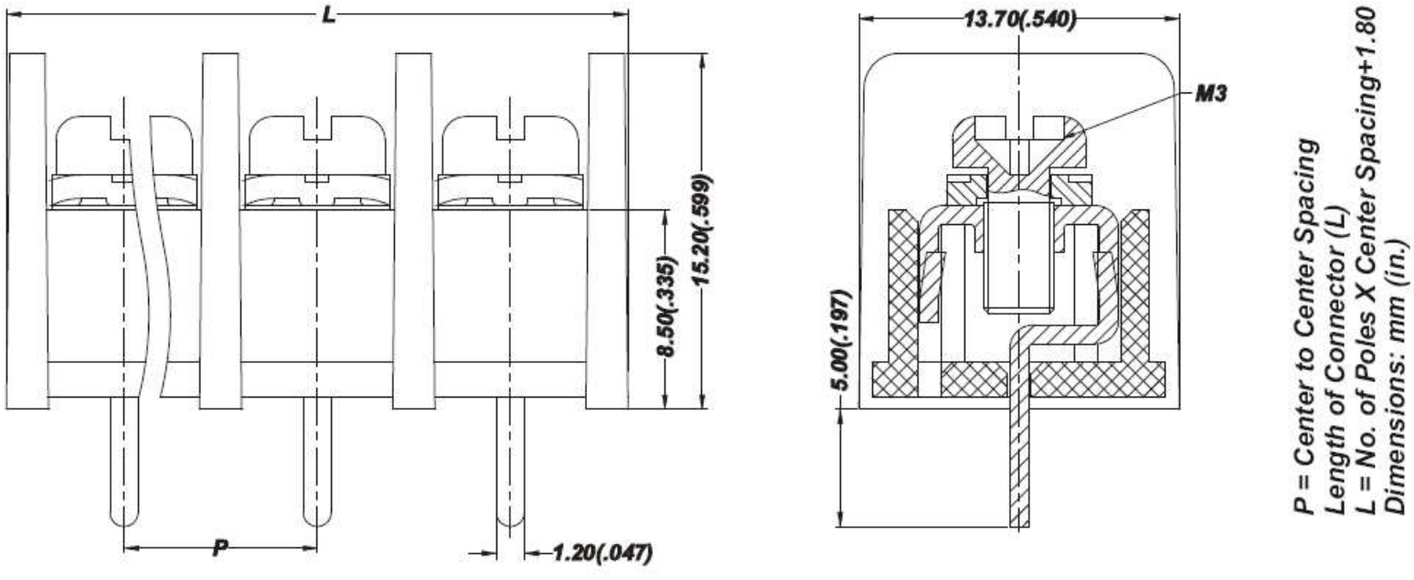

ORDERING INFORMATION

BTB555 — 1 0 — □□ — □ — □□

Style	Poles	Color	Options*
00 to 99	02 to 32	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash ( ).