

**PLUGGABLE
TERMINAL BLOCK**




TYPE BTB555



SPECIFICATIONS


WIRE ENTRANCE: Vertical to PCB	MAX. TORQUE: 7 lb-in.
CENTER SPACING: 8.255mm / 0.325 in	PRESSURE PLATE: Steel, Ni Plated
WIRE RANGE: 12--26 AWG	SCREW: M3, Steel, Ni Plated
ELECTRICAL RATING: 300V, 20A	TERMINAL: Brass, Tin Plated
BREAKDOWN VOLTAGE: 4,000V	TEMPERATURE:
MOLDING: Thermoplastic, UI94	OPERATING: -40°C to +120°C
V-0, Self Extinguishing	-40°F to + 248°F
	MAX. SOLDERING: 260°C , +500°F
	for 5 seconds

MECHANICAL DIMENSIONS

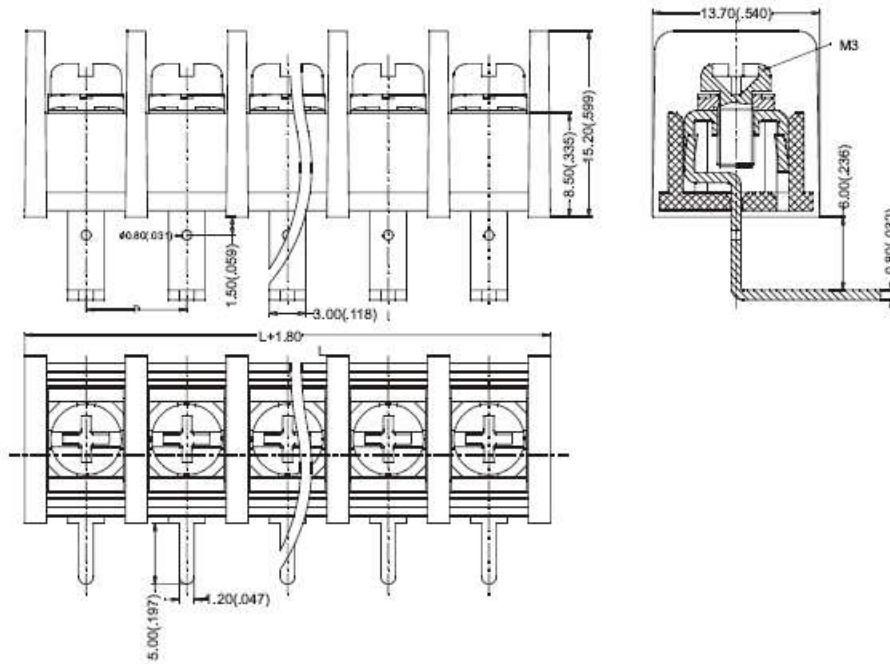

P=Center to Center Spacing
 L=number of Poles x Spacing+2.00
 Dimensions: mm (in.)

ORDERING INFORMATION

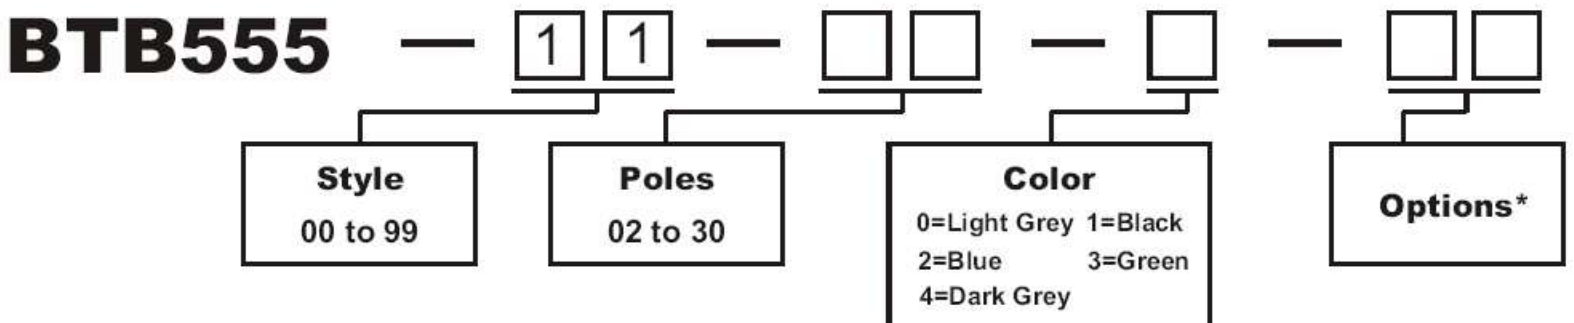

Options*: M1~M9, For Customer Modification (Please provide sketch).
 If more than one option is required, please separate each option with a dash (-).