BARRIER
TERMINAL BLOCK

TYPE BTB651

SPECIFICATIONS

WIRE ENTRANCE: .....Parallel to PCB
CENTER SPACING: .....7.62mm / 0.300in.
WIRE RANGE: .....14--22 AWG
ELECTRICAL RATING: 300V, 15A
BREAKDOWN VOLTAGE: 4,000V
MOLDING: .....Thermoplastic,
UL94, V-0
Self Extinguishing

MAX. TORQUE: .....5 lb-in.
PRESSURE PLATE:.....Steel, Ni Plated
SCREW: ..... M3, Steel, Ni Plated
TERMINAL : .....Brass, Tin Plated
OPERATING: .....-40°C to +105°C
-40°F to +221°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

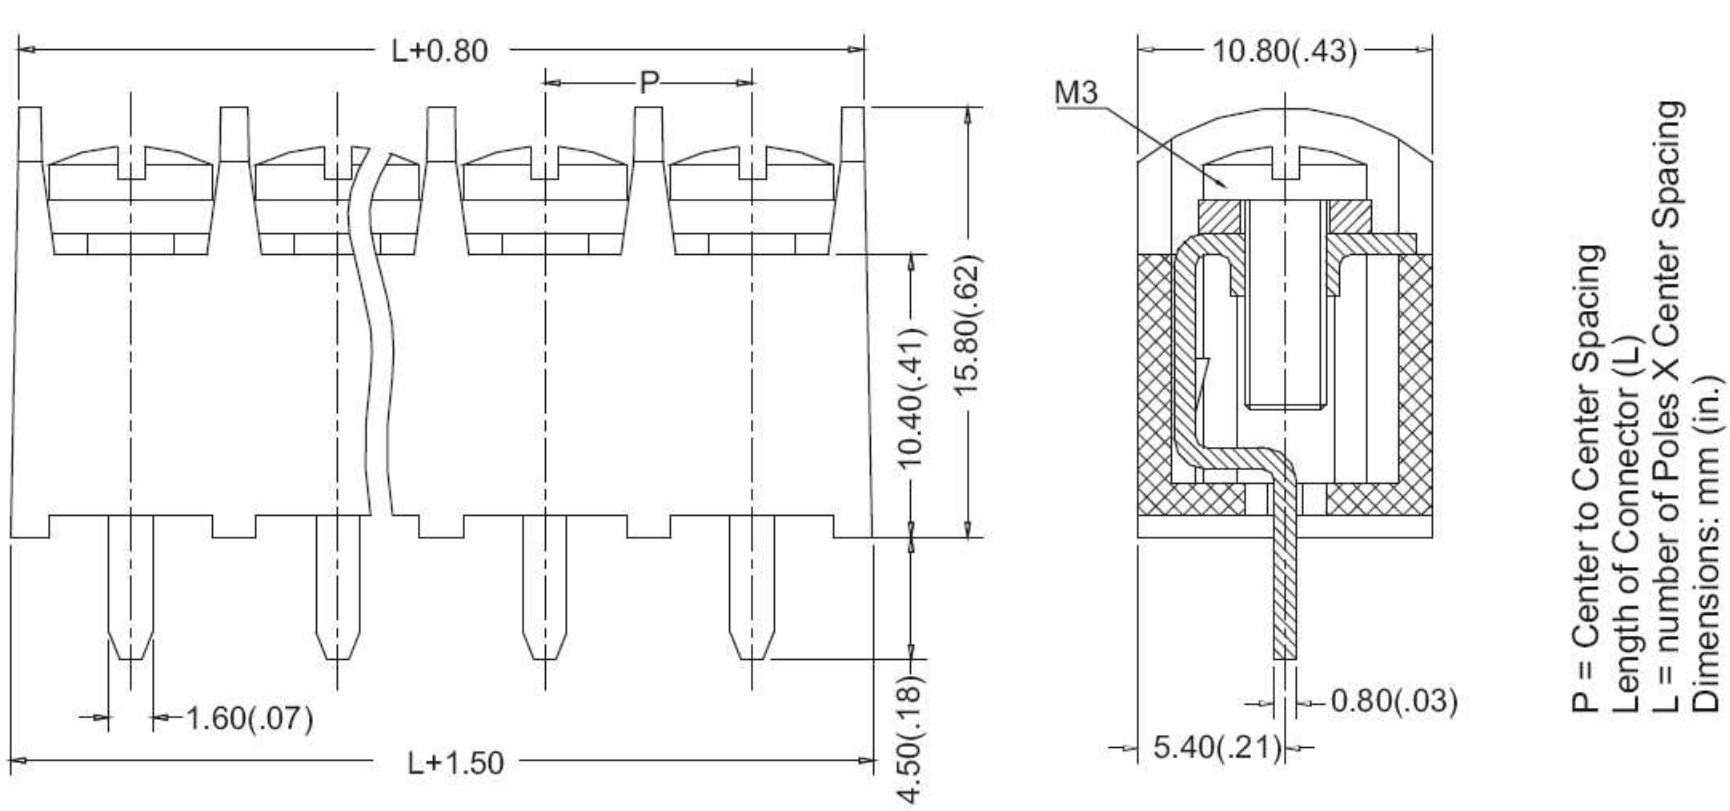

ORDERING INFORMATION

BTB651 — 0 0 — □ □ — □ — M □ □

Style	Poles	Color	Options*
00 to 99	02 to 20	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey 5=Milk White	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).