




BTB651-02-M2

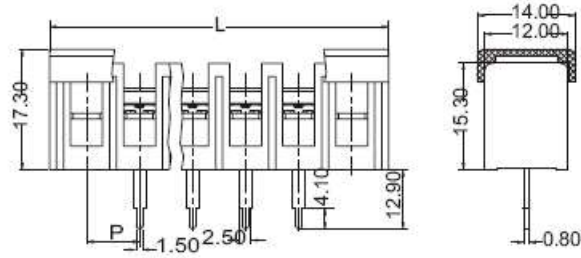

P=Pitch

L=PX Poles+2P+3

TECHNICAL DATA

| | |
|-------------------|-----------|
| PITCH | 7.62mm |
| WIRE RANGE | 22-14AWG |
| MAX. TORQUE | 7lb-in. |
| ELECTRICAL RATING | 300V, 10A |
| BREAKDOWN VOLTAGE | 4,000V |

MATERIALS

| | |
|---------------|------------------------|
| BODY | PBT,UL94,V-0 |
| SCREW | M3,STEEL,NICKEL PLATED |
| TERMINAL BODY | BRASS,TIN PLATED |

| | |
|-------------------|----------------|
| OPERATING | -40°C ~ +120°C |
| PCB HOLE DIAMETER | ø1.75mm |

| PxPoles | L | PxPoles | L |
|---------|--------|---------|--------|
| 02 | 33.48 | 19 | 163.02 |
| 03 | 41.10 | 20 | 170.64 |
| 04 | 48.72 | 21 | 178.26 |
| 05 | 56.34 | 22 | 185.88 |
| 06 | 63.96 | 23 | 193.50 |
| 07 | 71.58 | 24 | 201.12 |
| 08 | 79.20 | 25 | 208.74 |
| 09 | 86.82 | 26 | 216.36 |
| 10 | 94.44 | 27 | 223.98 |
| 11 | 102.06 | 28 | 231.60 |
| 12 | 109.68 | 29 | 239.22 |
| 13 | 117.30 | 30 | 246.84 |
| 14 | 124.92 | 31 | 254.46 |
| 15 | 132.54 | 32 | 262.08 |
| 16 | 140.16 | 33 | 269.70 |
| 17 | 147.78 | 34 | 277.32 |
| 18 | 155.40 | | |

ORDERING INFORMATION

