




## BTB651-02-M3

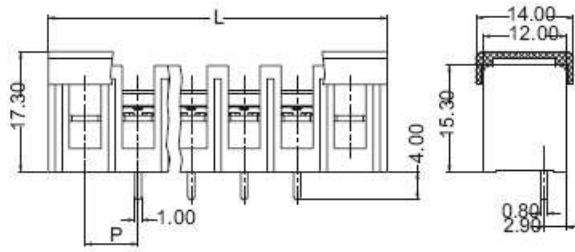

P=Pitch

L=PxPoles+2P+3

### TECHNICAL DATA

PITCH	7.62mm
WIRE RANGE	22-14AWG
MAX. TORQUE	7lb-in.
ELECTRICAL RATING	300V, 10A
BREAKDOWN VOLTAGE	4,000V


### MATERIALS

BODY	PBT,UL94,V0
SCREW	M3,STEEL,NICKEL PLATED
TERMINAL BODY	BRASS,TIN PLATED

OPERATING	-40°C ~ +120°C
PCB HOLE DIAMETER	ø1.5mm

PxPoles	L	PxPoles	L
02	33.48	19	163.02
03	41.10	20	170.64
04	48.72	21	178.26
05	56.34	22	185.88
06	63.96	23	193.50
07	71.58	24	201.12
08	79.20	25	208.74
09	86.82	26	216.36
10	94.44	27	223.98
11	102.06	28	231.60
12	109.68	29	239.22
13	117.30	30	246.84
14	124.92	31	254.46
15	132.54	32	262.08
16	140.16	33	269.70
17	147.78	34	277.32
18	155.40		

## ORDERING INFORMATION

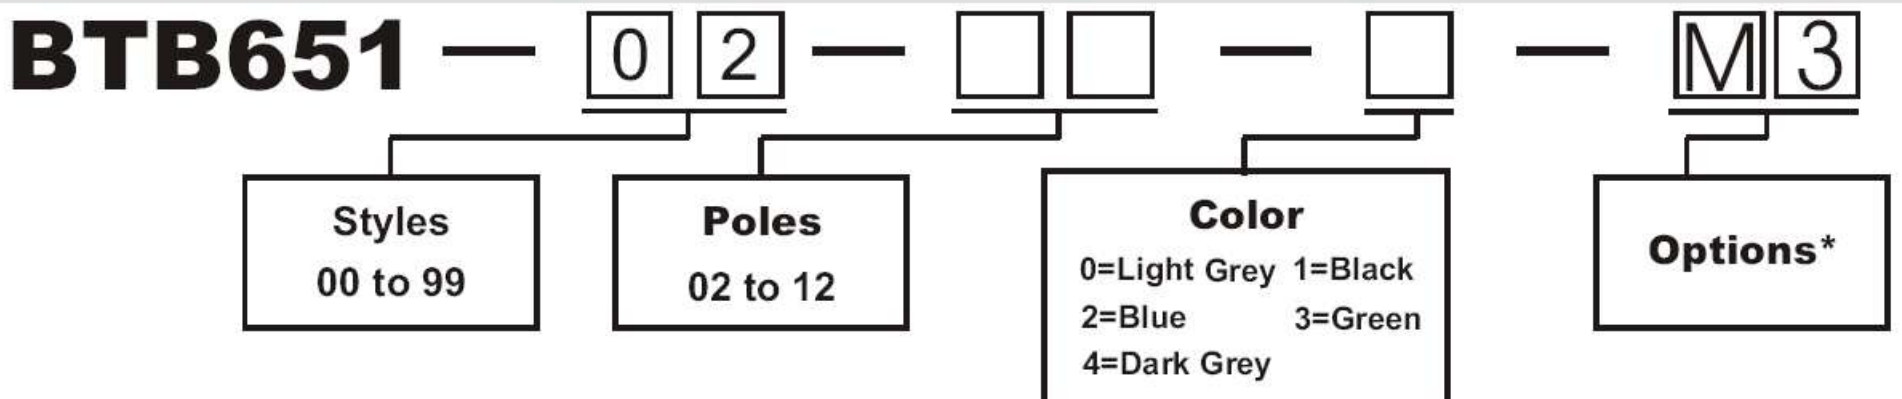

**Options\*:** M1~M9, For Customer Modification (Please provide sketch).

If more than one option is required, please separate each option with a dash (-).