




## BTB651-03-M3

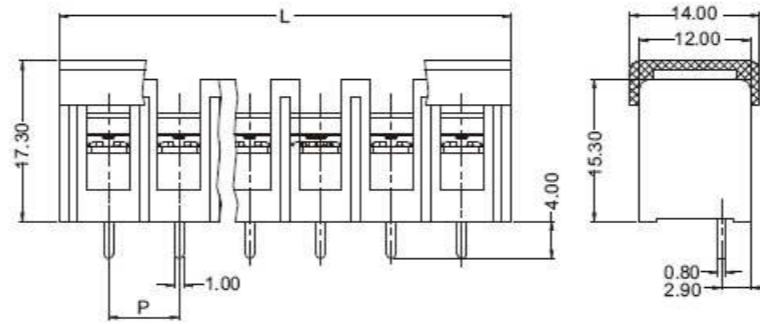

P=Pitch  
L=PxPoles+3

### TECHNICAL DATA

PITCH	7.62mm
WIRE RANGE	22--14AWG
MAX. TORQUE	7lb-in.
ELECTRICAL RATING	300V, 10A
BREAKDOWN VOLTAGE	4,000V


### MATERIALS

BODY	PBT,UL94,V-0
SCREW	M3,STEEL,NICKEL PLATED
TERMINAL BODY	BRASS,TIN PLATED

OPERATING	-40°C ~ +120°C
PCB HOLE DIAMETER	ø1.5mm

PxPoles	L	PxPoles	L
02	18.24	18	140.16
03	25.86	19	147.78
04	33.48	20	155.40
05	41.10	21	163.02
06	48.72	22	170.64
07	56.34	23	178.26
08	63.96	24	185.88
09	71.58	25	193.50
10	79.20	26	201.12
11	86.82	27	208.74
12	94.44	28	216.36
13	102.06	29	223.98
14	109.68	30	231.60
15	117.30		
16	124.92		
17	132.54		

## ORDERING INFORMATION

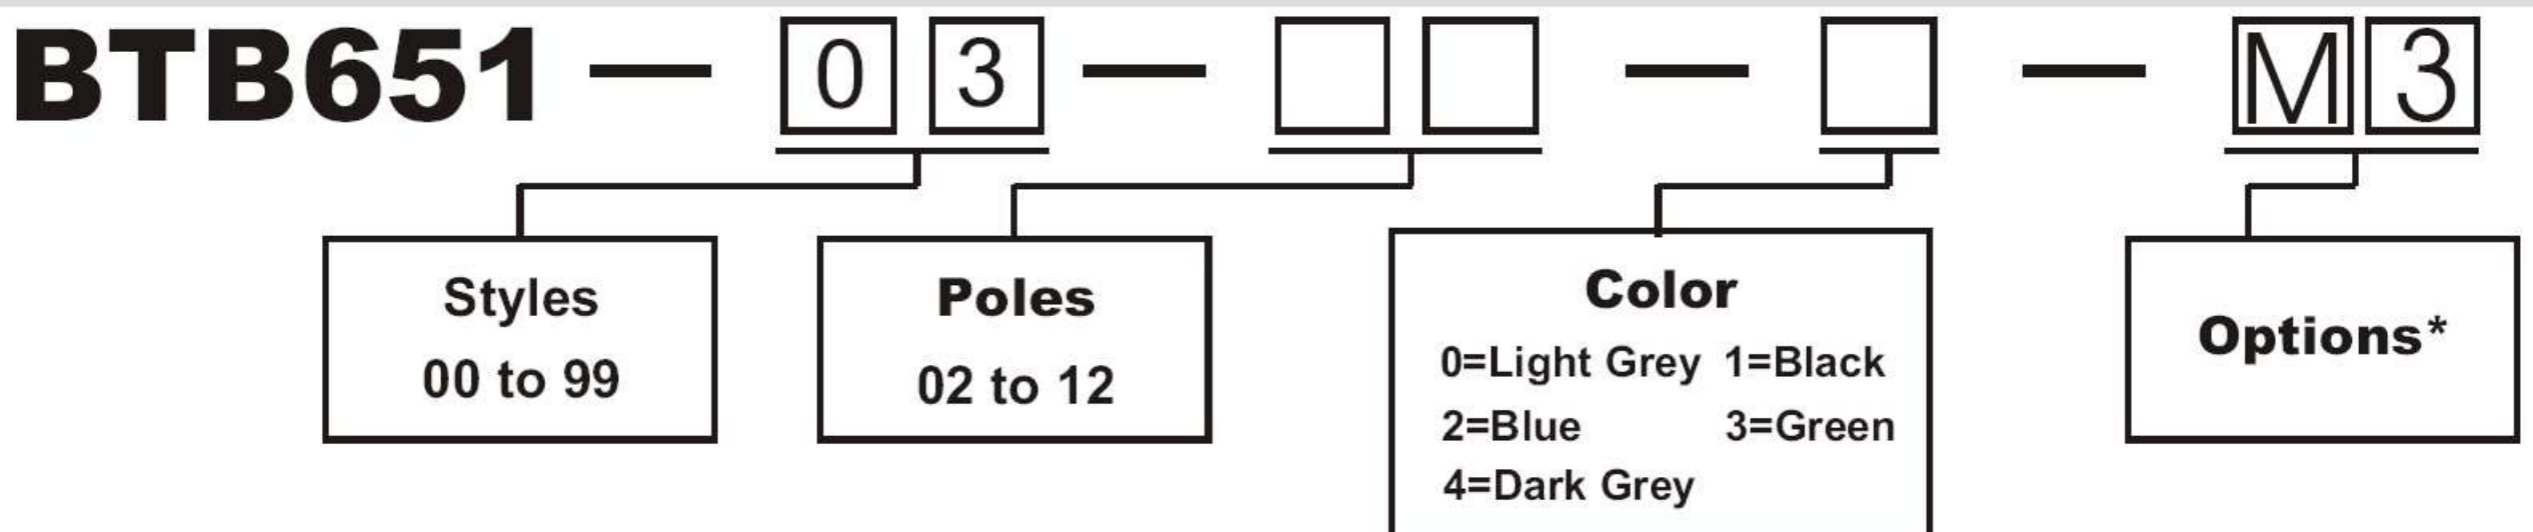

**Options\*:** M1~M9, For Customer Modification (Please provide sketch).

If more than one option is required, please separate each option with a dash (-).