




BTB651-08

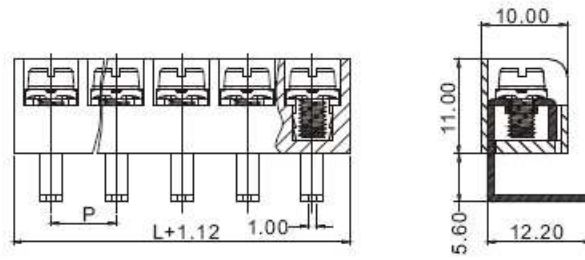

P=Pitch

L=P X Poles

TECHNICAL DATA

PITCH	7.62mm
WIRE RANGE	22-14AWG
MAX. TORQUE	7lb-in.
ELECTRICAL RATING	300V, 10A
BREAKDOWN VOLTAGE	4,000V

MATERIALS

BODY	PBT,UL94,V0
SCREW	M3,STEEL,NICKEL PLATED
TERMINAL BODY	BRASS,TIN PLATED

OPERATING	-40°C ~ +120°C
PCB HOLE DIAMETER	ø1.5mm

Poles	L	Poles	L
02	16.36		
03	23.98		
04	31.60		
05	39.22		
06	46.84		
07	54.46		
08	62.08		
09	69.70		
10	77.32		
11	84.94		
12	92.56		
13	100.18		
14	107.80		
15	115.42		
16	123.04		

ORDERING INFORMATION

