BARRIER TERMINAL BLOCK

TYPE BTB654

SPECIFICATIONS

WIRE ENTRANCE: .....Parallel to PCB
CENTER SPACING: .....9.525mm / 0.375 in.
WIRE RANGE: .....12--22 AWG
ELECTRICAL RATING: 300V, 20A
BREAKDOWN VOLTAGE: 4,000V
MOLDING: .....PBT+GF30%, UL94, V-0
Self Extinguishing

MAX. TORQUE: .....7 lb-in.
PRESSURE PLATE:.....Steel, Ni Plated
SCREW: ..... M3.5, Steel, Ni Plated
TERMINAL : .....Brass, Tin Plated
OPERATING: .....-40°C to +120°C
-40°F to + 248°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

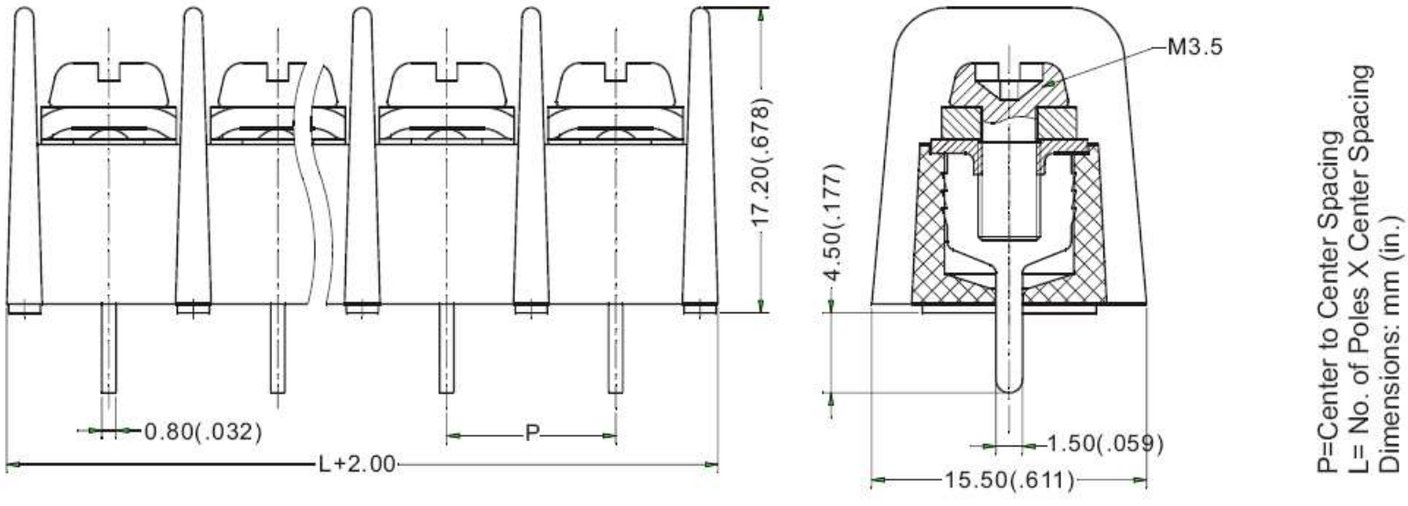

ORDERING INFORMATION

BTB654— 0 0 **—** □ □ **—** □ **—** M 8

Style	Poles	Color	
00 to 99	02 to 30	0=Light Grey	1=Black
		2=Blue	3=Green
		4=Dark Grey	

M8: The terminal of M7 is changed orientation

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).