BARRIER TERMINAL BLOCK

TYPE BTB654

SPECIFICATIONS

WIRE ENTRANCE: .....Parallel to PCB
CENTER SPACING: .....9.525mm / 0.375 in.
WIRE RANGE: .....12--22 AWG
ELECTRICAL RATING: 300V, 20A
BREAKDOWN VOLTAGE: 4,000V
MOLDING: .....Thermoplastic, UL94, V-0
Self Extinguishing

MAX. TORQUE: .....7 lb-in.
SCREW: ..... M3.5, Steel, Ni Plated
TERMINAL BODY: .....Brass, Tin Plated
OPERATING: .....-40°C to +105°C
-40°F to + 221°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

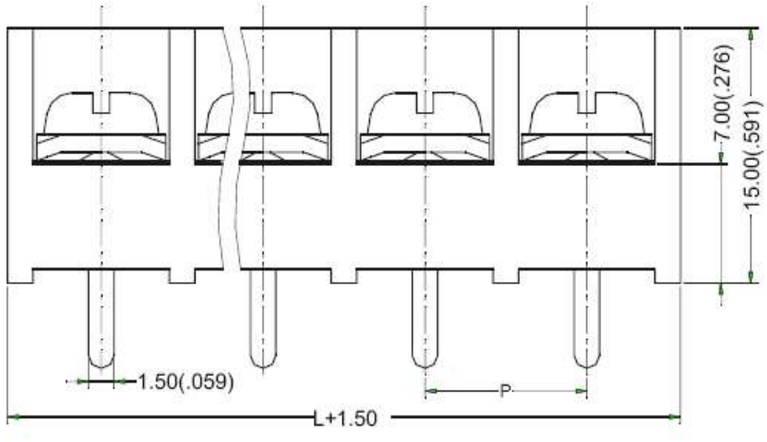

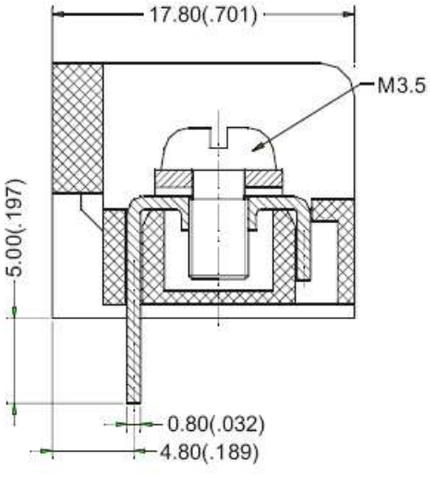

P = Center to Center Spacing
Length of Connector (L)
L = number of Poles X Center Spacing+1.50
Dimensions: mm (in.)

ORDERING INFORMATION

BTB654— 0 8 **—** □ □ **—** □ **—** □ □

Style	Poles	Color	Options*
00 to 99	02 to 31	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).