




## BTB654-26-M1

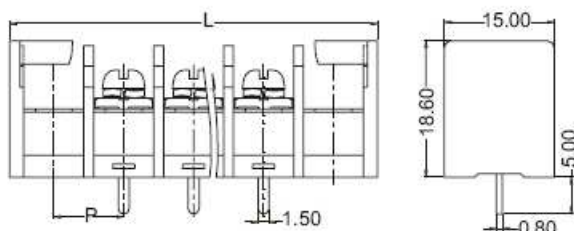

P=Pitch

$L = P \times \text{Poles} + 2P + 2.5$

### TECHNICAL DATA

**W**:E183240

PITCH	9.525mm
WIRE RANGE	22-12AWG
MAX. TORQUE	7lb-in.
ELECTRICAL RATING	300V, 20A
BREAKDOWN VOLTAGE	4,000V

### MATERIALS

BODY	PBT,UL94,V0
SCREW	M3.5,STEEL,NICKEL PLATED
TERMINAL BODY	BRASS,TIN PLATED
OPERATING	-40°C ~ +120°C
PCB HOLE DIAMETER	ø2.0mm

Poles	L	Poles	L
02	40.60		
03	50.13		
04	59.65		
05	69.18		
06	78.70		
07	88.23		
08	97.75		
09	107.28		
10	116.80		
11	126.33		
12	135.85		

## ORDERING INFORMATION

