BARRIER
TERMINAL BLOCK

TYPE BTB654

SPECIFICATIONS

WIRE ENTRANCE:	Parallel to PCB
CENTER SPACING:	9.525mm / 0.375 in.
WIRE RANGE:	12--22 AWG
ELECTRICAL RATING:	300V, 20A
BREAKDOWN VOLTAGE:	4,000V
MOLDING:	PBT+GF30%, UL94, V-0 Self Extinguishing
MAX. TORQUE:	7 lb-in.
PRESSURE PLATE:	Brass, Ni Plated
SCREW:	M3.5, Brass, Ni Plated
TERMINAL :	Brass, Tin Plated
OPERATING:	-40°C to +120°C -40°F to + 248°F
MAX. SOLDERING:	260°C , +500°F for 5 seconds

MECHANICAL DIMENSIONS

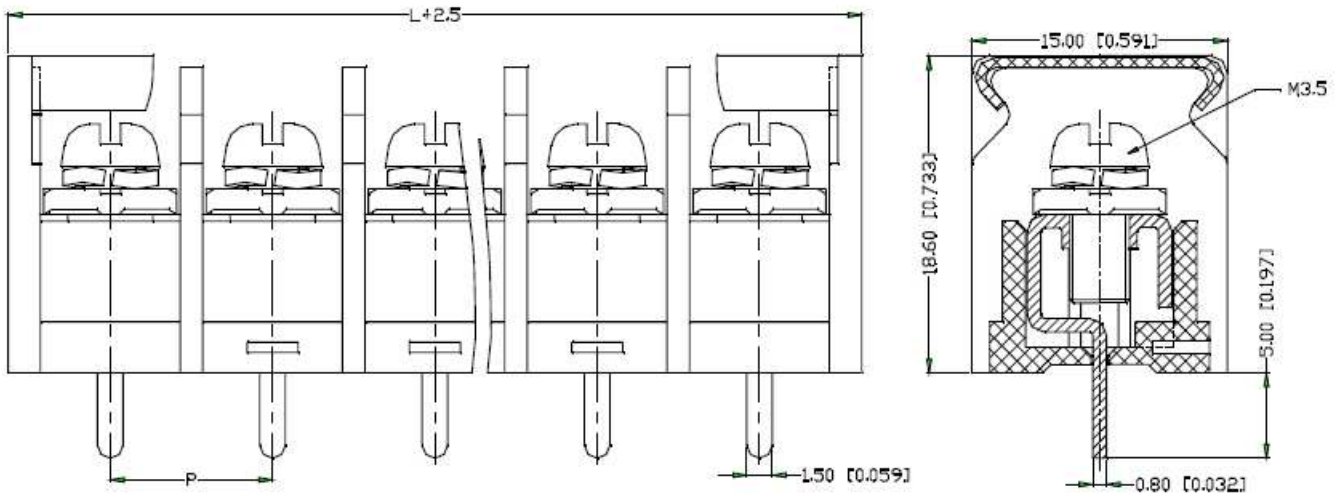

ORDERING INFORMATION

BTB654— 2 6 — □ □ — □ — □ □

Style	Poles	Color	Options*
00 to 99	02 to 21	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).