

**BARRIER  
TERMINAL BLOCK**


**TYPE BTB656**




**SPECIFICATIONS**

WIRE ENTRANCE: .....Parallel to PCB	MAX. TORQUE: .....13 lb-in.
CENTER SPACING: .....14.27mm / 0.562 in.	PRESSURE PLATE:.....Steel, Ni Plated
WIRE RANGE: .....10-16 AWG	SCREW: .....M4, Steel, Ni Plated
ELECTRICAL RATING: .....600V, 25A	TERMINAL : .....Brass, Tin Plated
BREAKDOWN VOLTAGE: .....6,000V	OPERATING: .....-40°C to +120°C
MOLDING: .....Thermoplastic, UL94, V-0, Self Extinguishing	MAX. SOLDERING: .....260°C , +500°F
COVER:.....PC Transparent	for 5 seconds

**MECHANICAL DIMENSIONS**

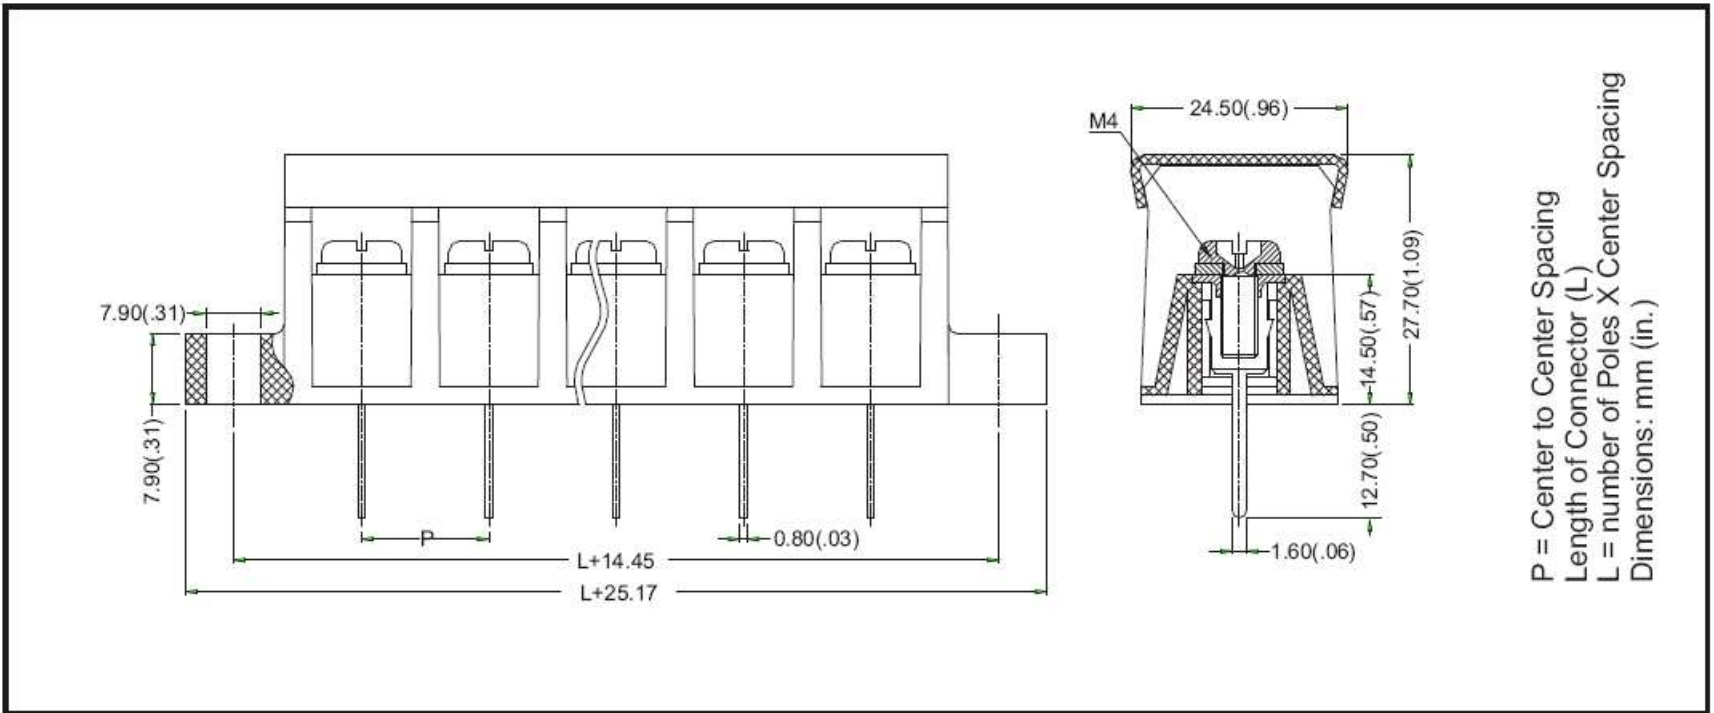

**ORDERING INFORMATION**

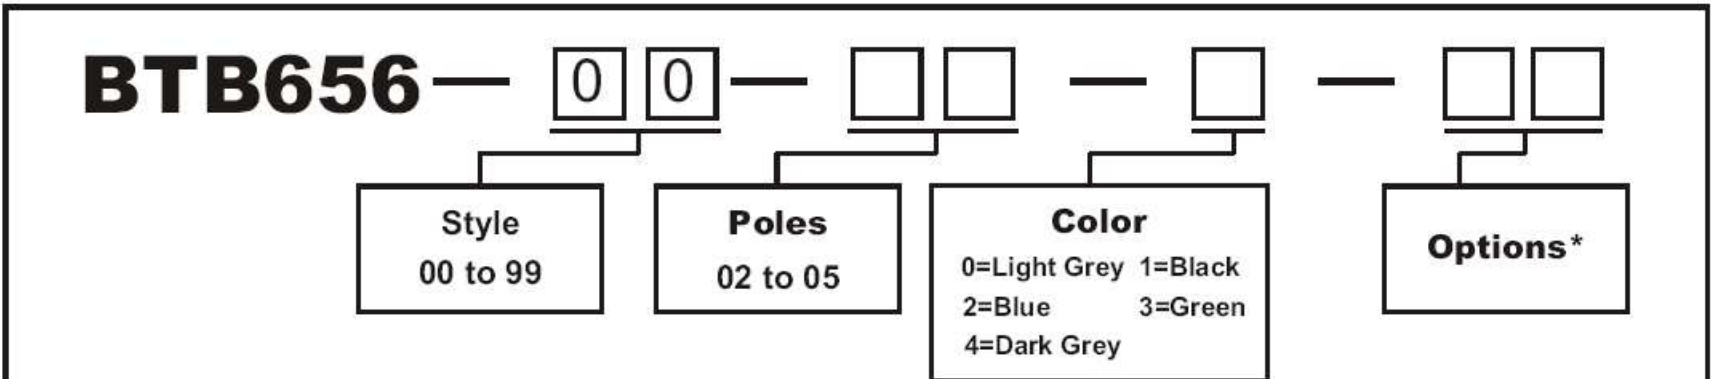

**Options\*:** M1~M9, For Customer Modification (Please provide sketch).  
If more than one option is required, please separate each option with a dash (-).