




## BTB670-00-M2

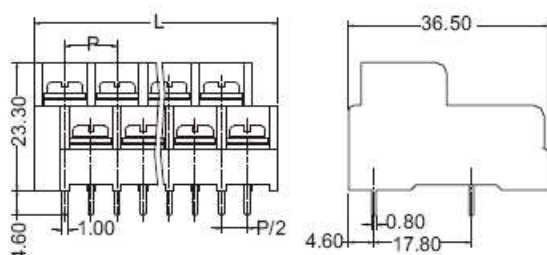

P=Pitch  
L=P X Poles+2P+6.438

### TECHNICAL DATA E183240

PITCH	9.525mm
WIRE RANGE	22-12AWG
MAX. TORQUE	7lb-in.
ELECTRICAL RATING	300V, 15A
BREAKDOWN VOLTAGE	4,000V

### MATERIALS

BODY	PA66,UL94,V-0
SCREW	M3.5,STEEL,NICKEL PLATED
TERMINAL BODY	BRASS,TIN PLATED

OPERATING	-40°C ~ +105°C
PCB HOLE DIAMETER	Ø1.5mm

Poles	L	Poles	L
02	25.49	18	177.89
03	35.01	19	187.41
04	44.54	20	196.94
05	54.06	21	206.46
06	63.59	22	215.99
07	73.11	23	225.51
08	82.64	24	235.04
09	92.16		
10	101.69		
11	111.21		
12	120.74		
13	130.26		
14	139.79		
15	149.31		
16	158.84		
17	168.36		

## ORDERING INFORMATION

