


**BARRIER
TERMINAL BLOCK**




TYPE BTB670




SPECIFICATIONS

WIRE ENTRANCE:Parallel to PCB	MAX. TORQUE:8 lb-in.
CENTER SPACING:9.525mm / 0.375in.	PRESSURE PLATE:.....Brass, Tin Plated
WIRE RANGE:12-22 AWG	SCREW: M3.5, Brass, Ni Plated
ELECTRICAL RATING:300V, 10A	OPERATING:-40°C to +120°C
BREAKDOWN VOLTAGE:4,000V	-40°F to + 248°F
MOLDING:PBT, UL94, V-0 Self Extinguishing	MAX. SOLDERING:260°C , +500°F for 5 seconds

MECHANICAL DIMENSIONS

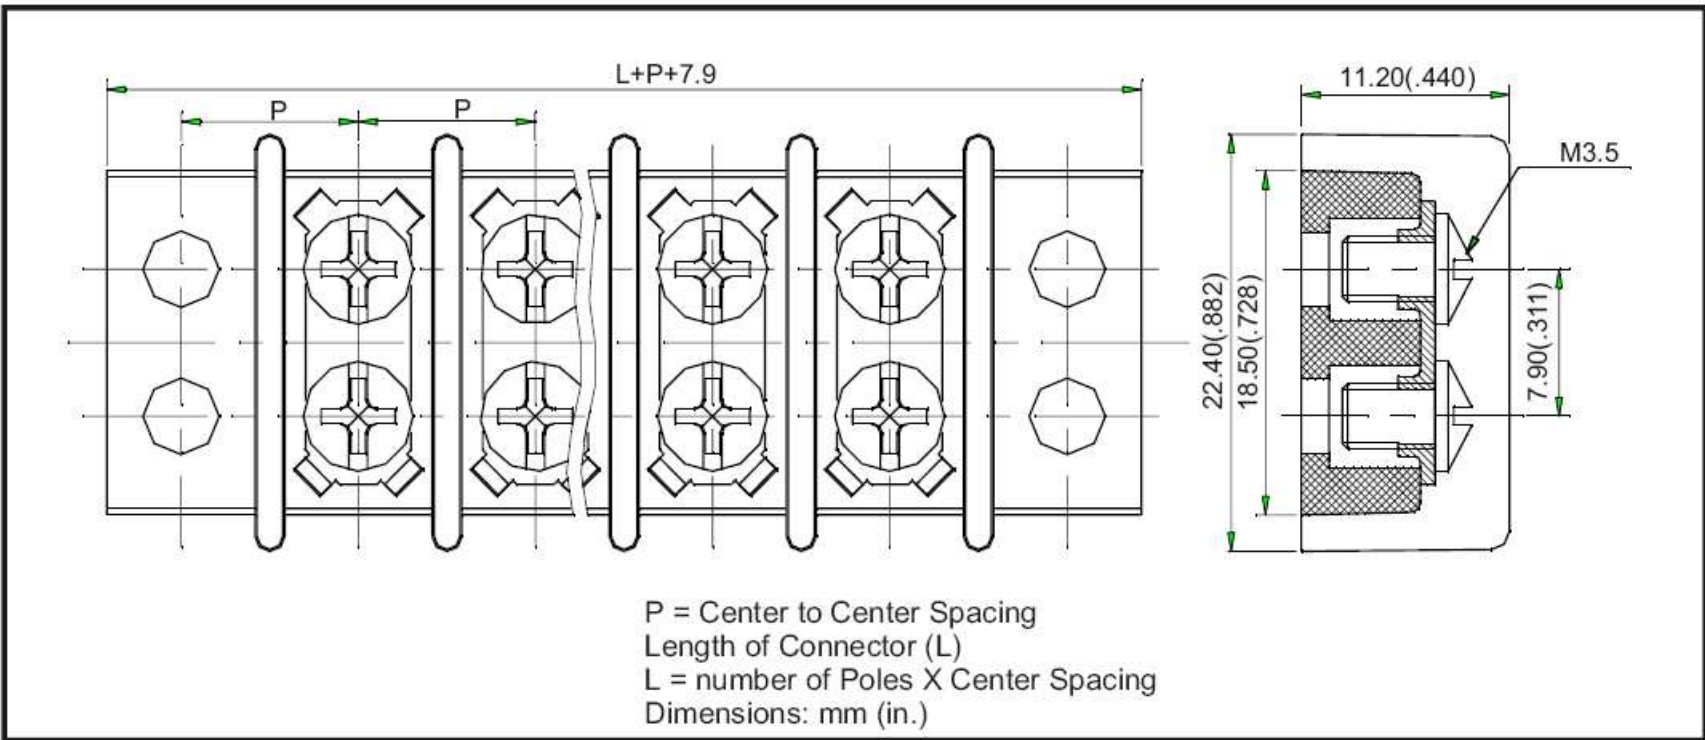

ORDERING INFORMATION

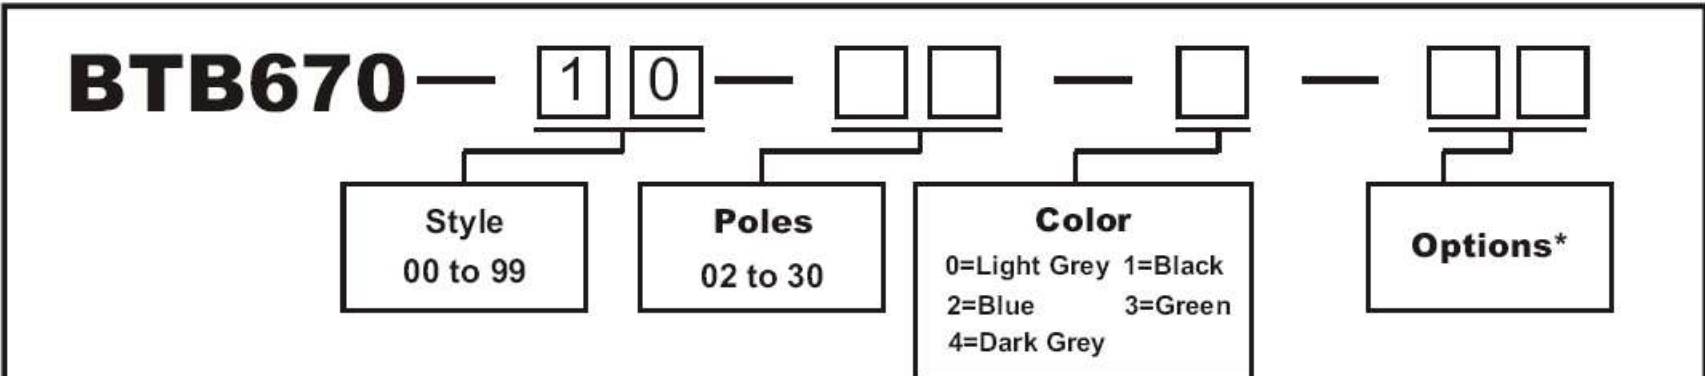

Options*: M1~M9, For Customer Modification (Please provide sketch).
 If more than one option is required, please separate each option with a dash (-).