




BTB670-14

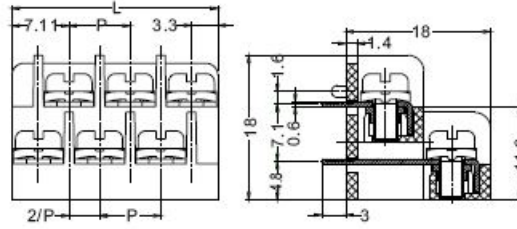

P=Pitch

L=P X Poles+2,79

TECHNICAL DATA

▲:E183240 ©:201660

PITCH	7.62mm
WIRE RANGE	22--18AWG
MAX. TORQUE	5lb-in.
ELECTRICAL RATING	300V, 10A
BREAKDOWN VOLTAGE	4,000V

MATERIALS

BODY	PBT,UL94,V-0
SCREW	M3,STEEL,NICKEL PLATED
TERMINAL BODY	BRASS,TIN PLATED

OPERATING	-40°C ~ +120°C
PCB HOLE DIAMETER	ø1.1mm

Poles	L	Poles	L
02	18.03	18	139.95
03	25.65	19	147.57
04	33.27	20	155.19
05	40.89	21	162.81
06	48.51	22	170.43
07	56.13	23	178.05
08	63.75	24	185.67
09	71.37		
10	78.99		
11	86.61		
12	94.23		
13	101.85		
14	109.47		
15	117.09		
16	124.71		
17	132.33		

ORDERING INFORMATION

BTB670 —

1 4 —

□ □ —

□ —

□ □

Styles
00 to 99

Poles
02 to 12

Color
0=Light Grey 1=Black
2=Blue 3=Green
4=Dark Grey

Options*