EURO
TERMINAL BLOCK

TYPE JTB251

SPECIFICATIONS

WIRE ENTRANCE: .....Parallel to PCB
CENTER SPACING: .....3.50mm / 0.138in.
WIRE RANGE: .....26--16 AWG
ELECTRICAL RATING: 150V, 10A
BREAKDOWN VOLTAGE: 2,500V
MOLDING: .....Polyamide, UL94, V-0
Self Extinguishing

MAX. TORQUE: .....2.1 lb-in.
WIRE PROTECTOR: .....Copper, Ni Plated
SCREW: .....M2, Steel, Zinc Plated
TERMINAL BODY: .....Brass, Tin Plated
OPERATING: .....-40°C to +105°C
-40°F to + 248°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

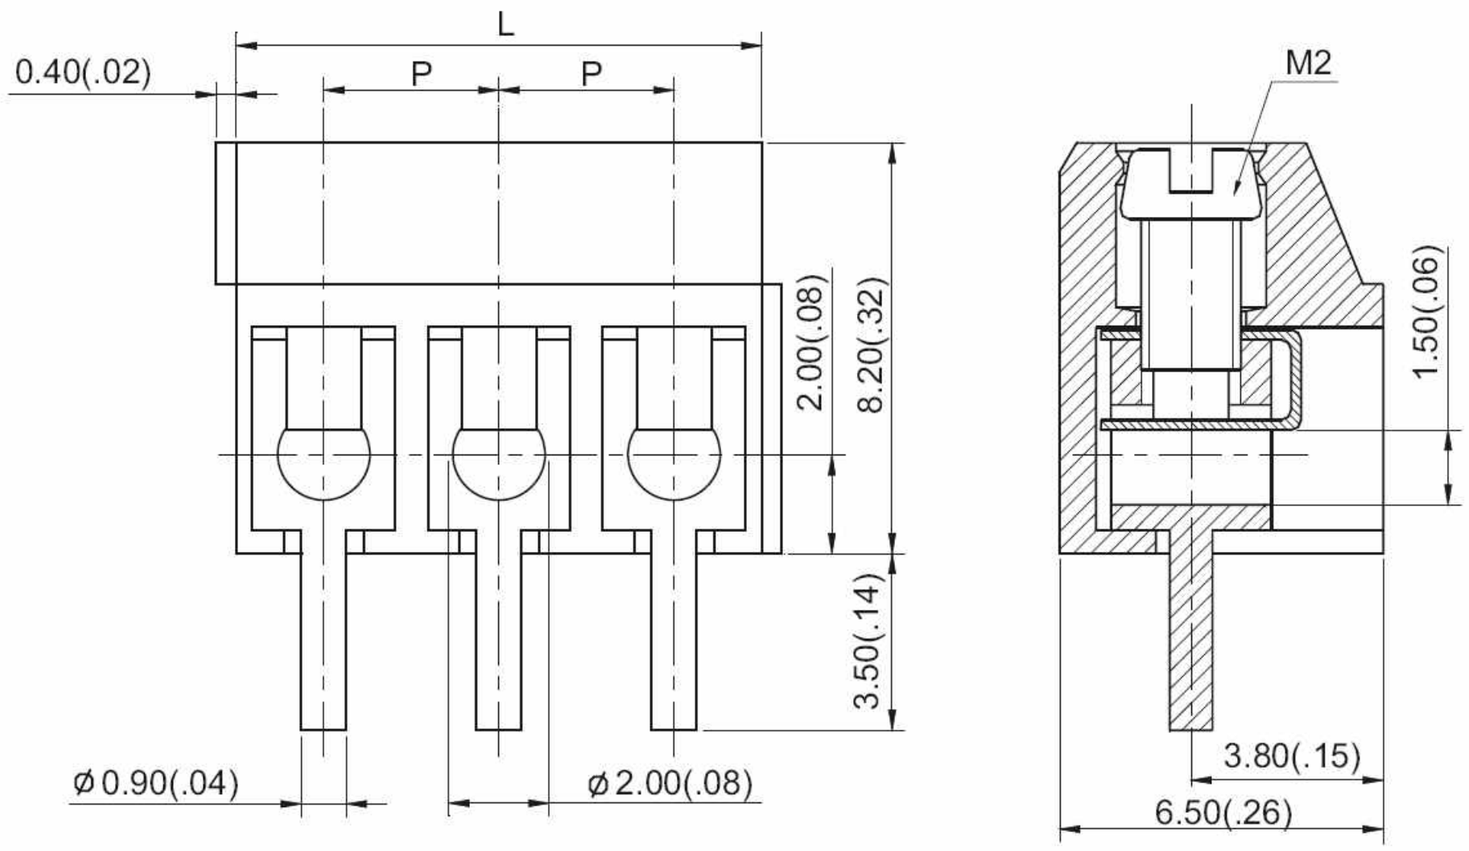

ORDERING INFORMATION

JTB251 — 0 1 — □ □ — □ — □ □

Styles	Poles	Color	Options*
00 to 99	02 to 24	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).