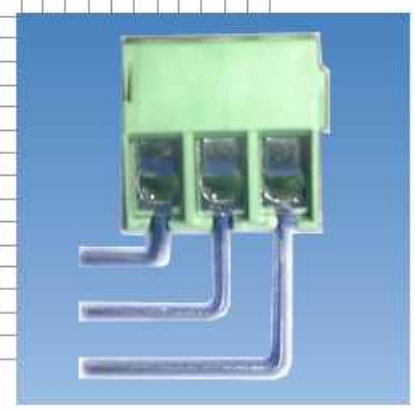

EURO
TERMINAL BLOCK

TYPE JTB450

SPECIFICATIONS

WIRE ENTRANCE: .....Parallel to PCB
CENTER SPACING: .....5.00mm / 0.197 in.

WIRE RANGE: .....14--24 AWG
ELECTRICAL RATING: 300V, 15A
BREAKDOWN VOLTAGE: 4,000V
MOLDING: Pa66, UL94, V-0
Self Extinguishing

MAX. TORQUE: .....3 lb-in.
WIRE PROTECTOR: .....Bronze, Ni Plated
SCREW: .....M3, Steel, Zinc Plated
TERMINAL BODY: .....Brass, Tin Plated
OPERATING: .....-40°C to +105°C
-40°F to + 221°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

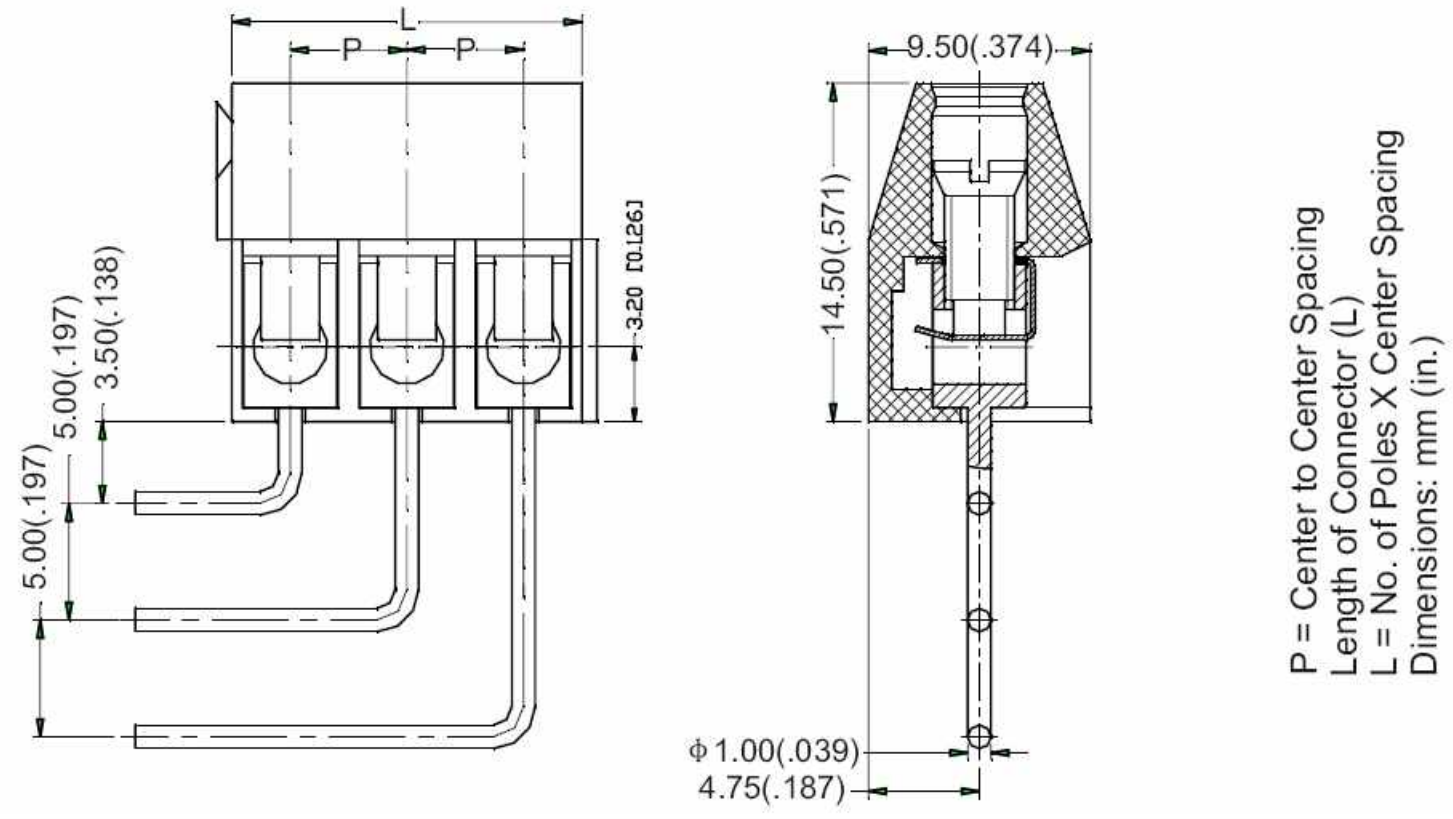

ORDERING INFORMATION

JTB450 — 04 — 1 — 03 — 2 — M2

Styles	Spacing	Poles	Color	Options*
00 to 99	1=5.00mm 2=5.08mm	02 to 32	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).