


**EURO
TERMINAL BLOCK**

**TYPE JTB450
SPECIFICATIONS**




WIRE ENTRANCE:Parallel to PCB	WIRE PROTECTOR:Bronze, Ni Plated
CENTER SPACING:5.00mm / 0.197 in.	SCREW:M2.5, Philips Screw
WIRE RANGE:14-22 AWG	Steel, Zinc Plated
ELECTRICAL RATING:300V, 10A	TERMINAL BODY :Brass, Tin Plated
BREAKDOWN VOLTAGE:4,000V	OPERATING:-40°C to +105°C
MOLDING:Polyamide, UL94, V-0	-40°F to + 221°F
Self Extinguishing	MAX. SOLDERING:260°C , +500°F
MAX TORQUE:3 lb-in.	for 5 seconds

MECHANICAL DIMENSIONS

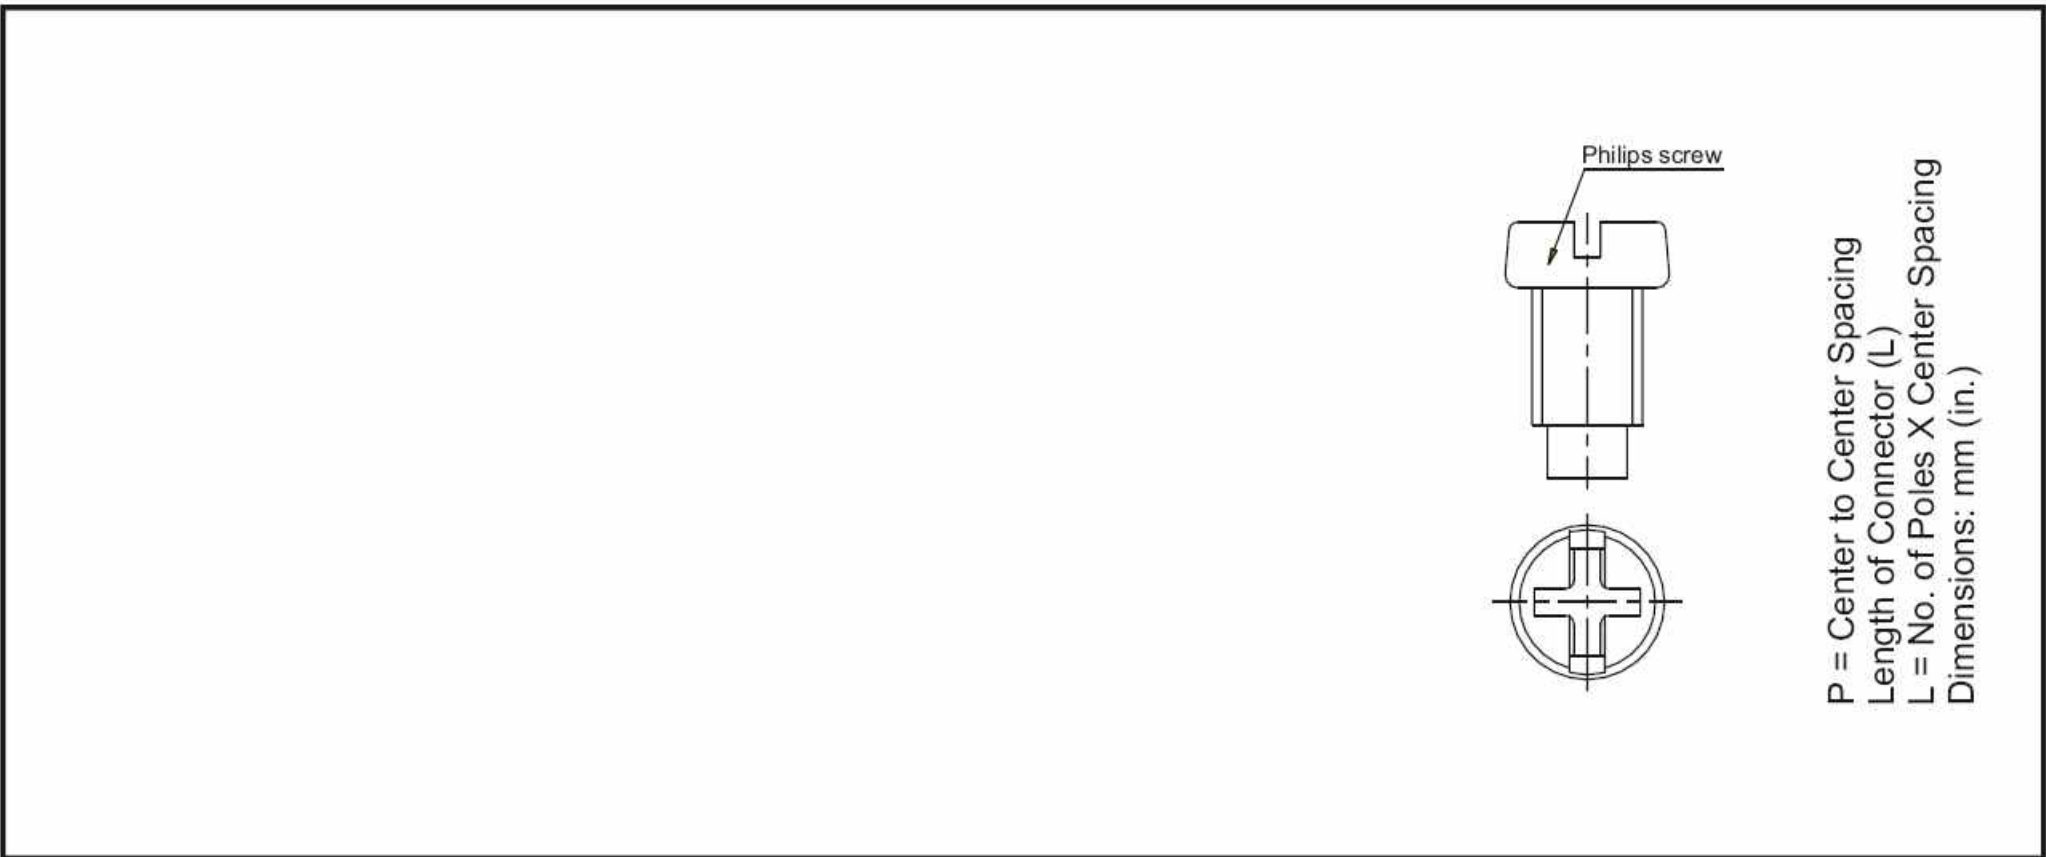

ORDERING INFORMATION

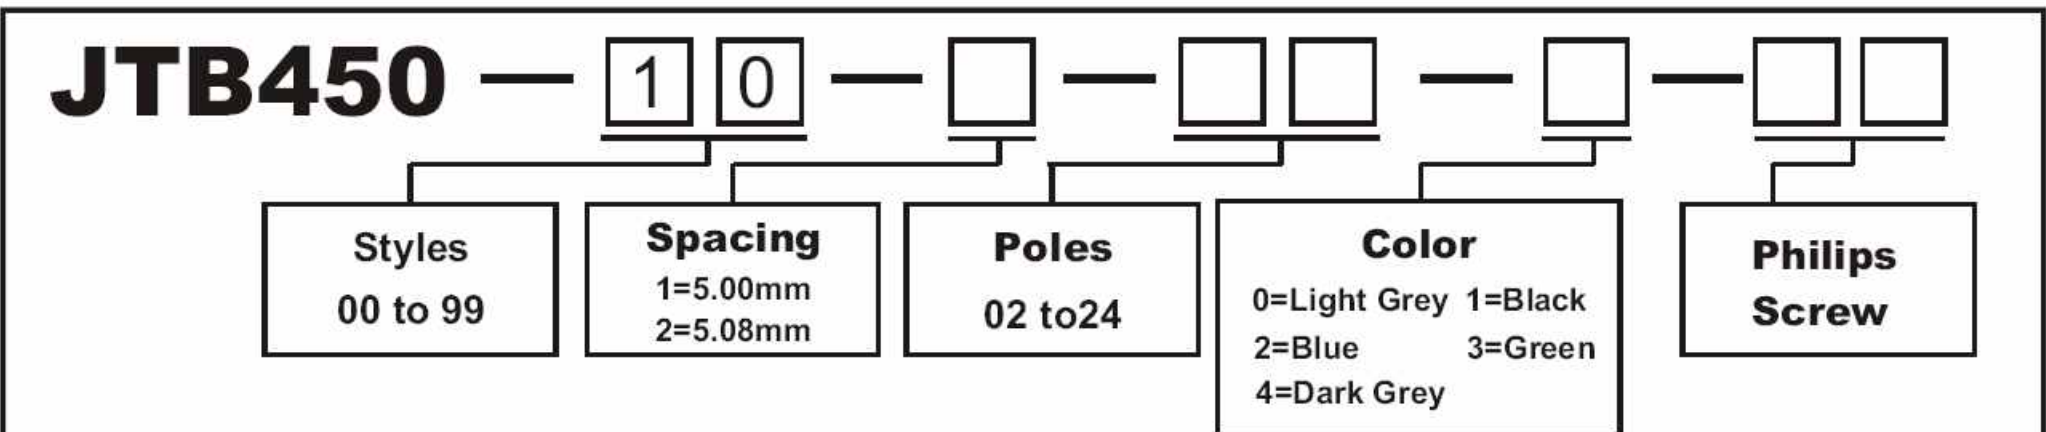

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (-).