


**EURO
TERMINAL BLOCK**




TYPE JTB552

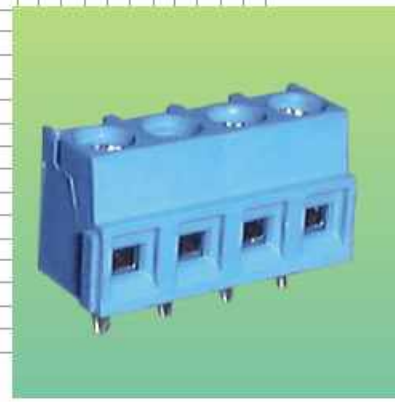


SPECIFICATIONS

WIRE ENTRANCE:Parallel to PCB	MAX. TORQUE:3 lb-in.
CENTER SPACING:5.00mm / 0.197 in.	WIRE CAGE:Brass, Ni Plated
WIRE RANGE:16--30 AWG	SCREW:M2.5, Brass, Ni Plated
ELECTRICAL RATING:300V, 10A	WIRE CAGE:Brass, Ni Plated
BREAKDOWN VOLTAGE:4,000V	TERMINAL :Brass, Tin Plated
MOLDING:Polyamide, UL94, V-0	OPERATING:.....-40°C to +105°C
Self Extinguishing	-40°F to +221°F
	MAX.SOLDERING:260°C, +500°F
	For 5 seconds

MECHANICAL DIMENSIONS

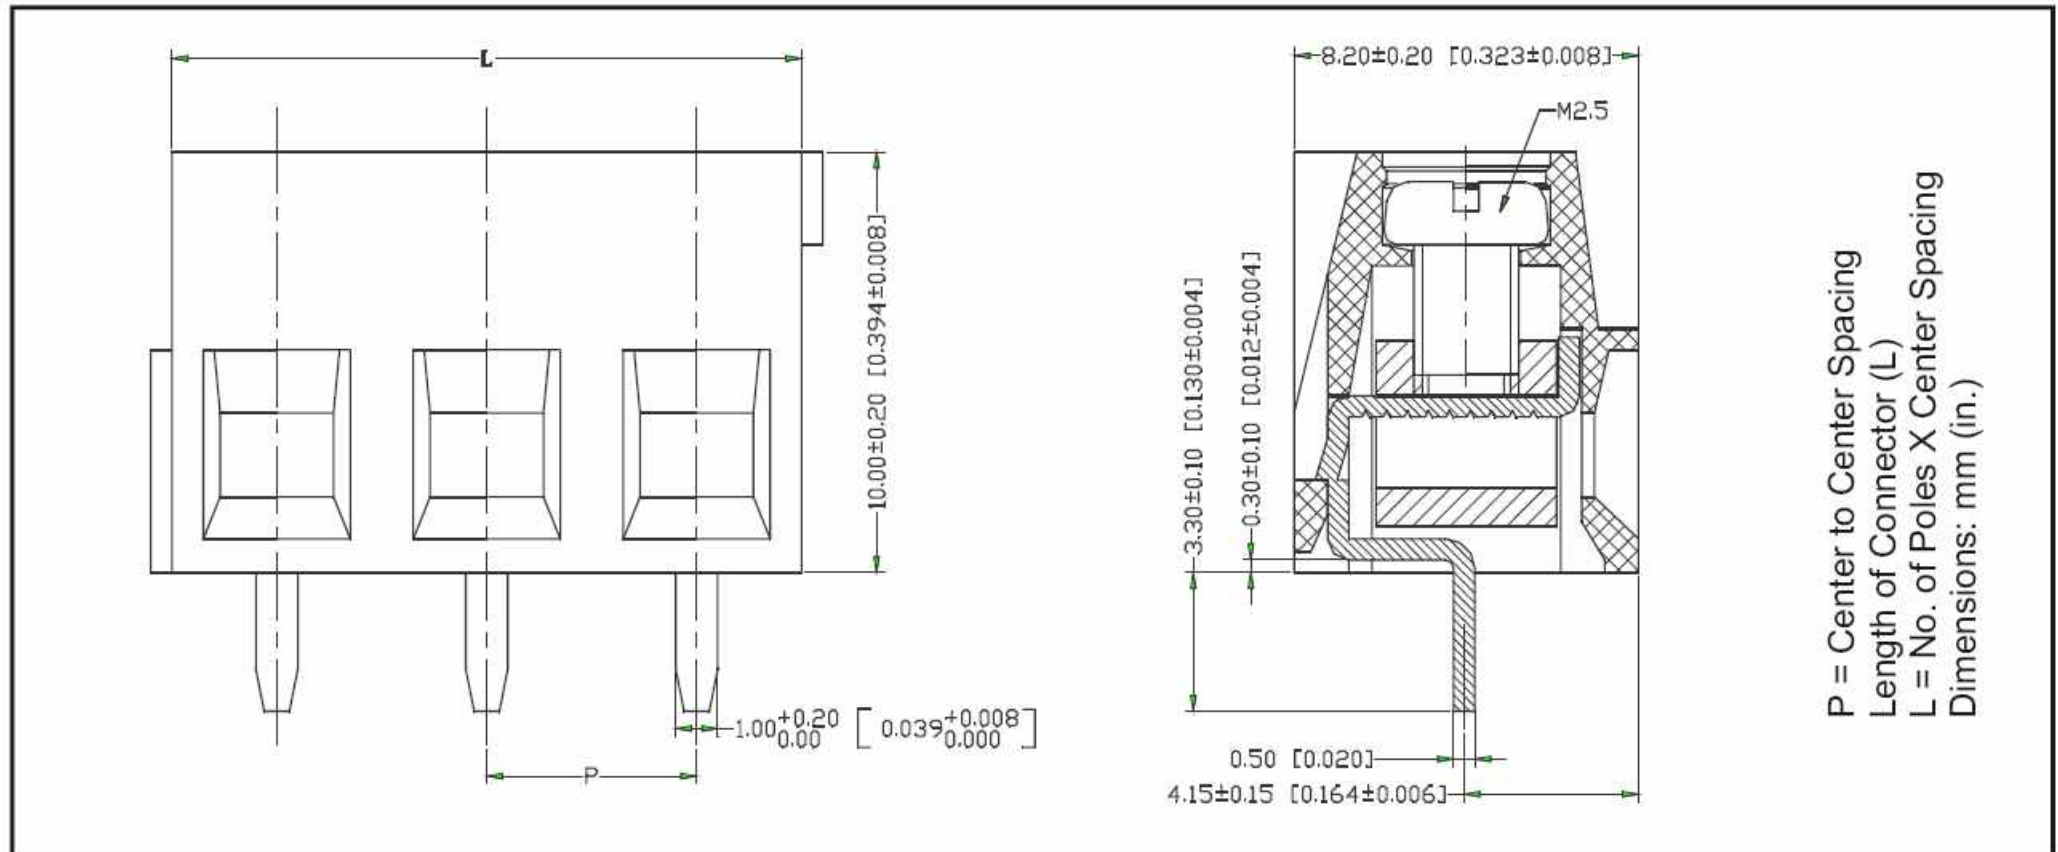

ORDERING INFORMATION

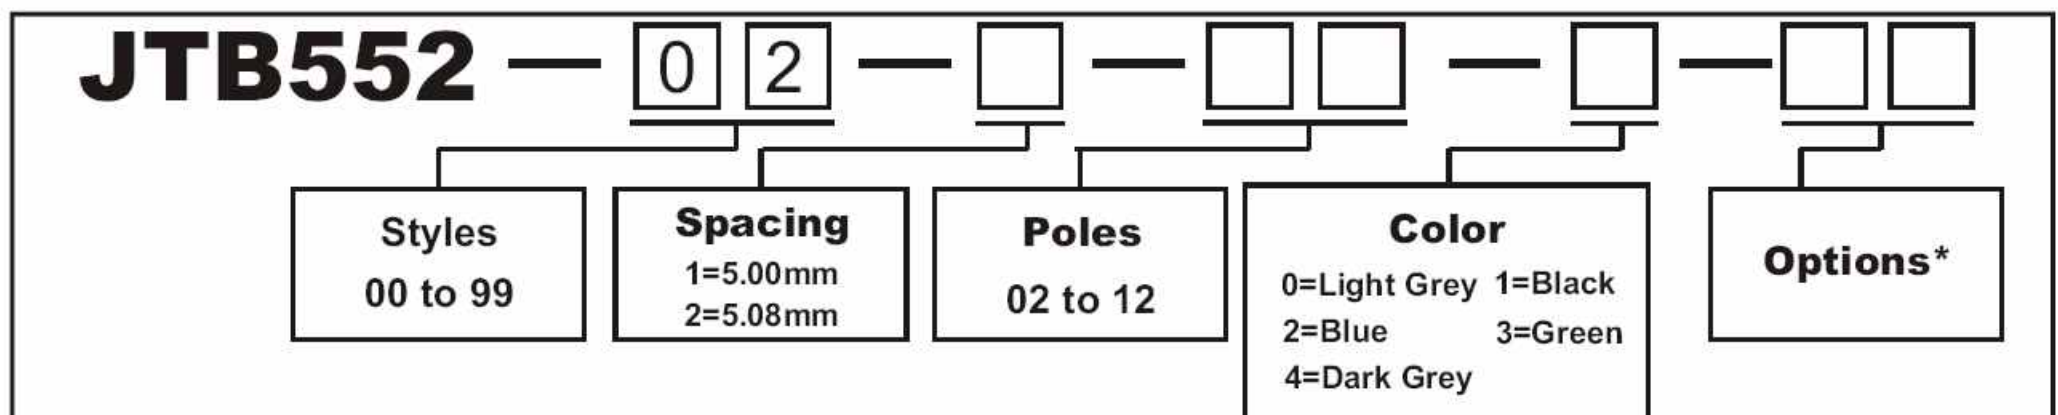

Options*: M1~M9, For Customer Modification (Please provide sketch).
 If more than one option is required, please separate each option with a dash (-).