


**EURO
TERMINAL BLOCK**




TYPE JTB552

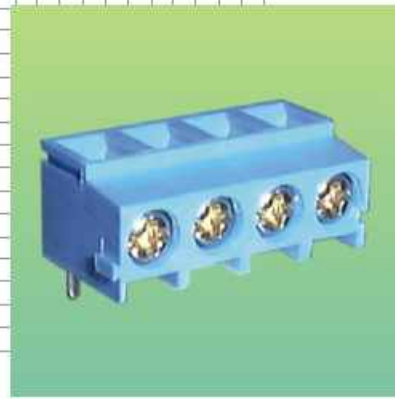


SPECIFICATIONS

WIRE ENTRANCE:Parallel to PCB	MAX.TORQUE:.....3.5 lb-in
CENTER SPACING:5.00mm / 0.197 in.	WIRE CAGE:.....Brass Ni Plated
WIRE RANGE:16--30 AWG	SCREW:M2.5 Steel,Zic Plated
ELECTRICAL RATING:300V, 10A	TERMINAL:Brass,Tin Plated
BREAKDOWN VOLTAGE:4,000V	OPERATING:-40°C to +105°C -40°F to + 221°F
MOLDING:Polyamide, UL94, V-0 Self Extinguishing	MAX. SOLDERING:260°C , +500°F for 5 seconds

MECHANICAL DIMENSIONS

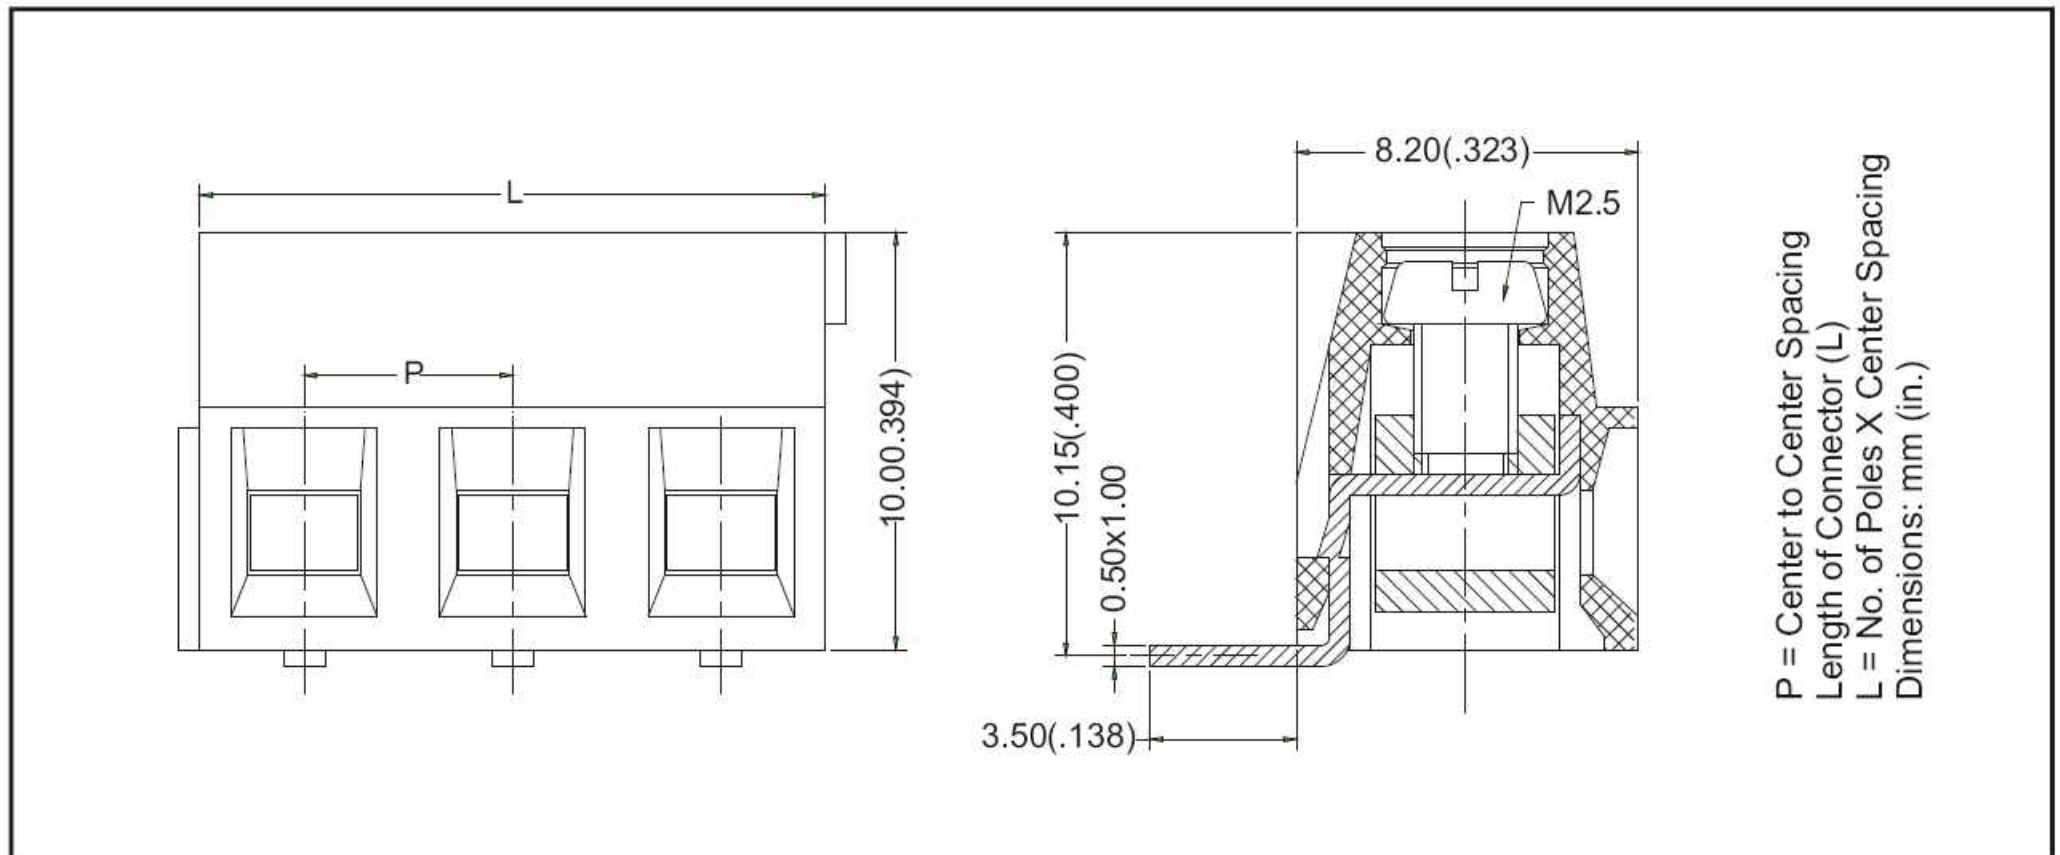

ORDERING INFORMATION

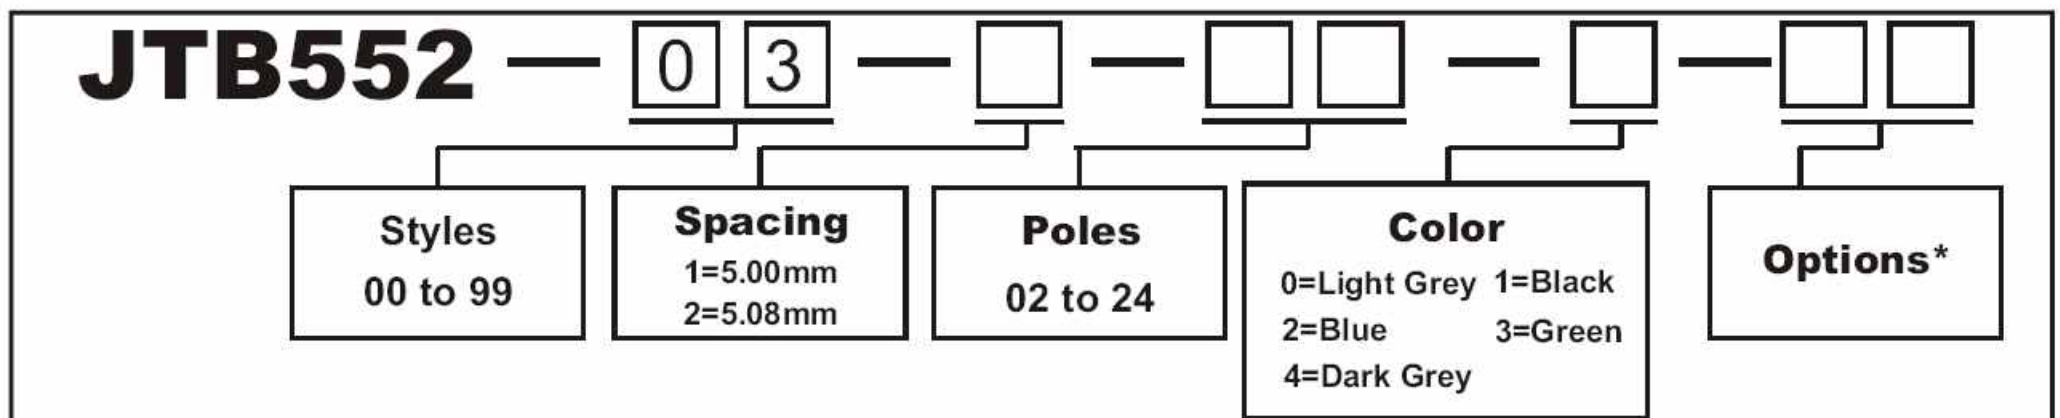

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (-).