


**EURO
TERMINAL BLOCK**




TYPE JTB552

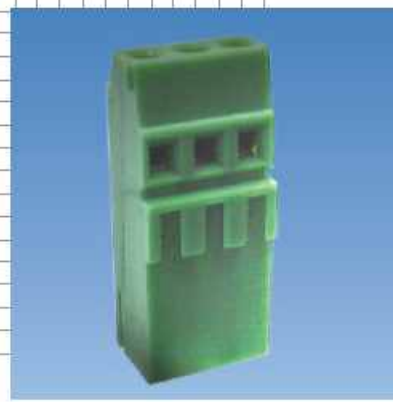


SPECIFICATIONS

WIRE ENTRANCE:Parallel to PCB	MAX. TORQUE:3 lb-in.
CENTER SPACING:5.00mm / 0.197 in.	WIRE PROTECTOR:Brass, Ni Plated
WIRE RANGE:12--26 AWG	SCREW:M2.5, Steel, Zinc Plated
ELECTRICAL RATING:300V, 15A	TERMINAL BODY:Brass, Tin Plated
BREAKDOWN VOLTAGE:4,000V	OPERATING:.....-40°C to +105°C
MOLDING:Polyamide, UL94, V-0	-40°C to +221°F
Self Extinguishing	MAX SOLDERING:.....260°C,+500°F
	For 5 Seconds

MECHANICAL DIMENSIONS

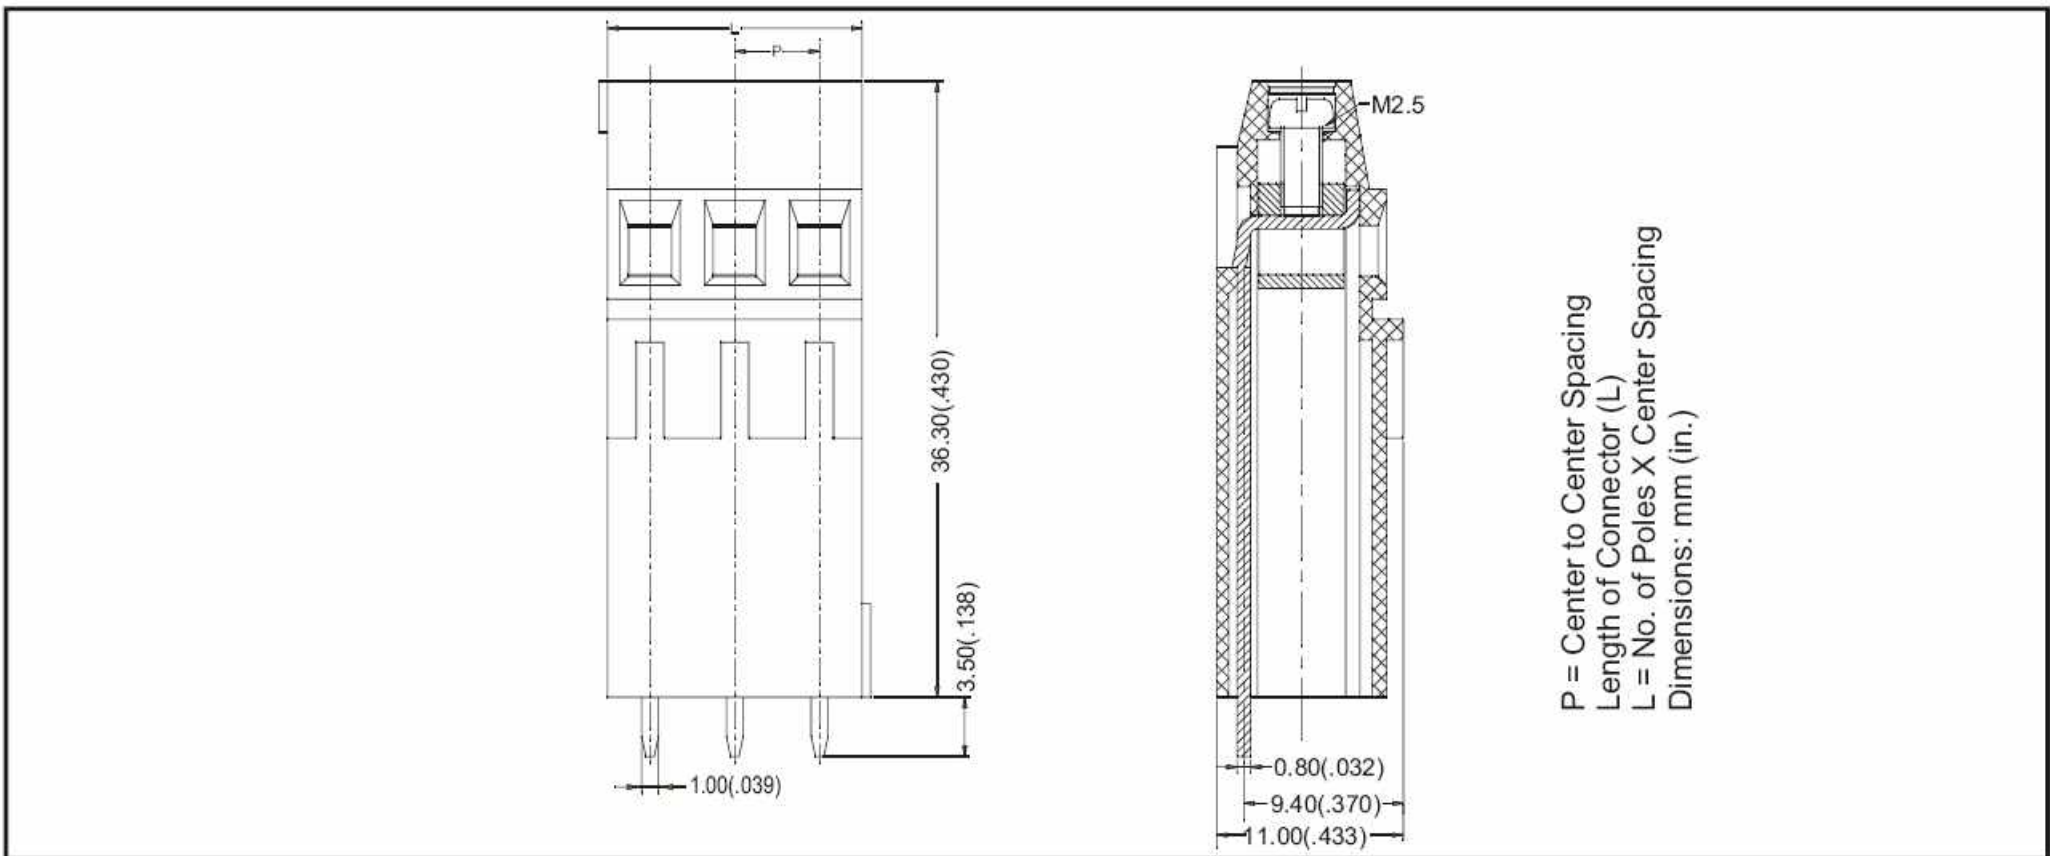

ORDERING INFORMATION

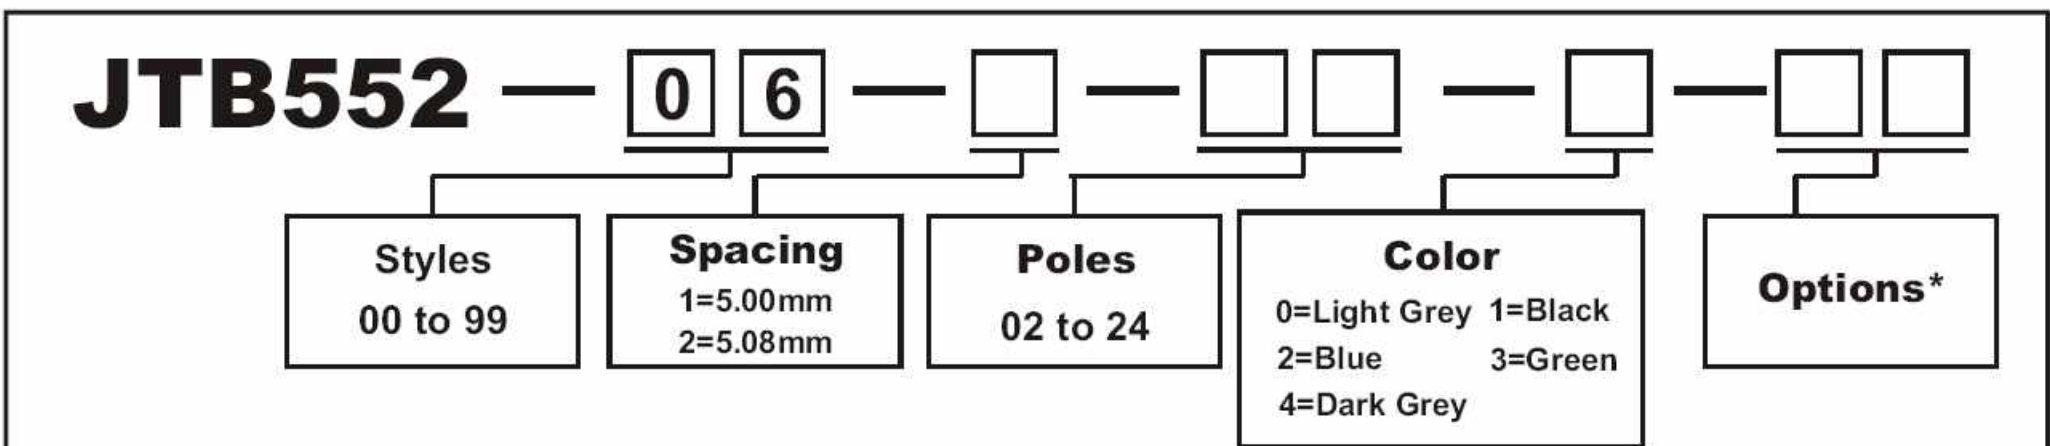

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (-).