



**EURO  
TERMINAL BLOCK**


**TYPE JTB611**




**SPECIFICATIONS**

WIRE ENTRANCE: .....35° to PCB	MAX. TORQUE: .....3lb-in.
CENTER SPACING: .....5.00mm / 0.197 in.	WIRE CAGE: .....Brass, Ni Plated
WIRE RANGE: .....14--26 AWG	SCREW: .....M3, Steel, Zinc Plated
ELECTRICAL RATING: .....300V, 10A	TERMINAL BODY : .....Brass, Tin Plated
BREAKDOWN VOLTAGE: .....4,000V	OPERATING: .....-40°C to +105°C -40°F to + 221°F
MOLDING: .....Polyamide, UL94, V-0 Self Extinguishing	MAX. SOLDERING: .....260°C , +500°F for 5 seconds

**MECHANICAL DIMENSIONS**

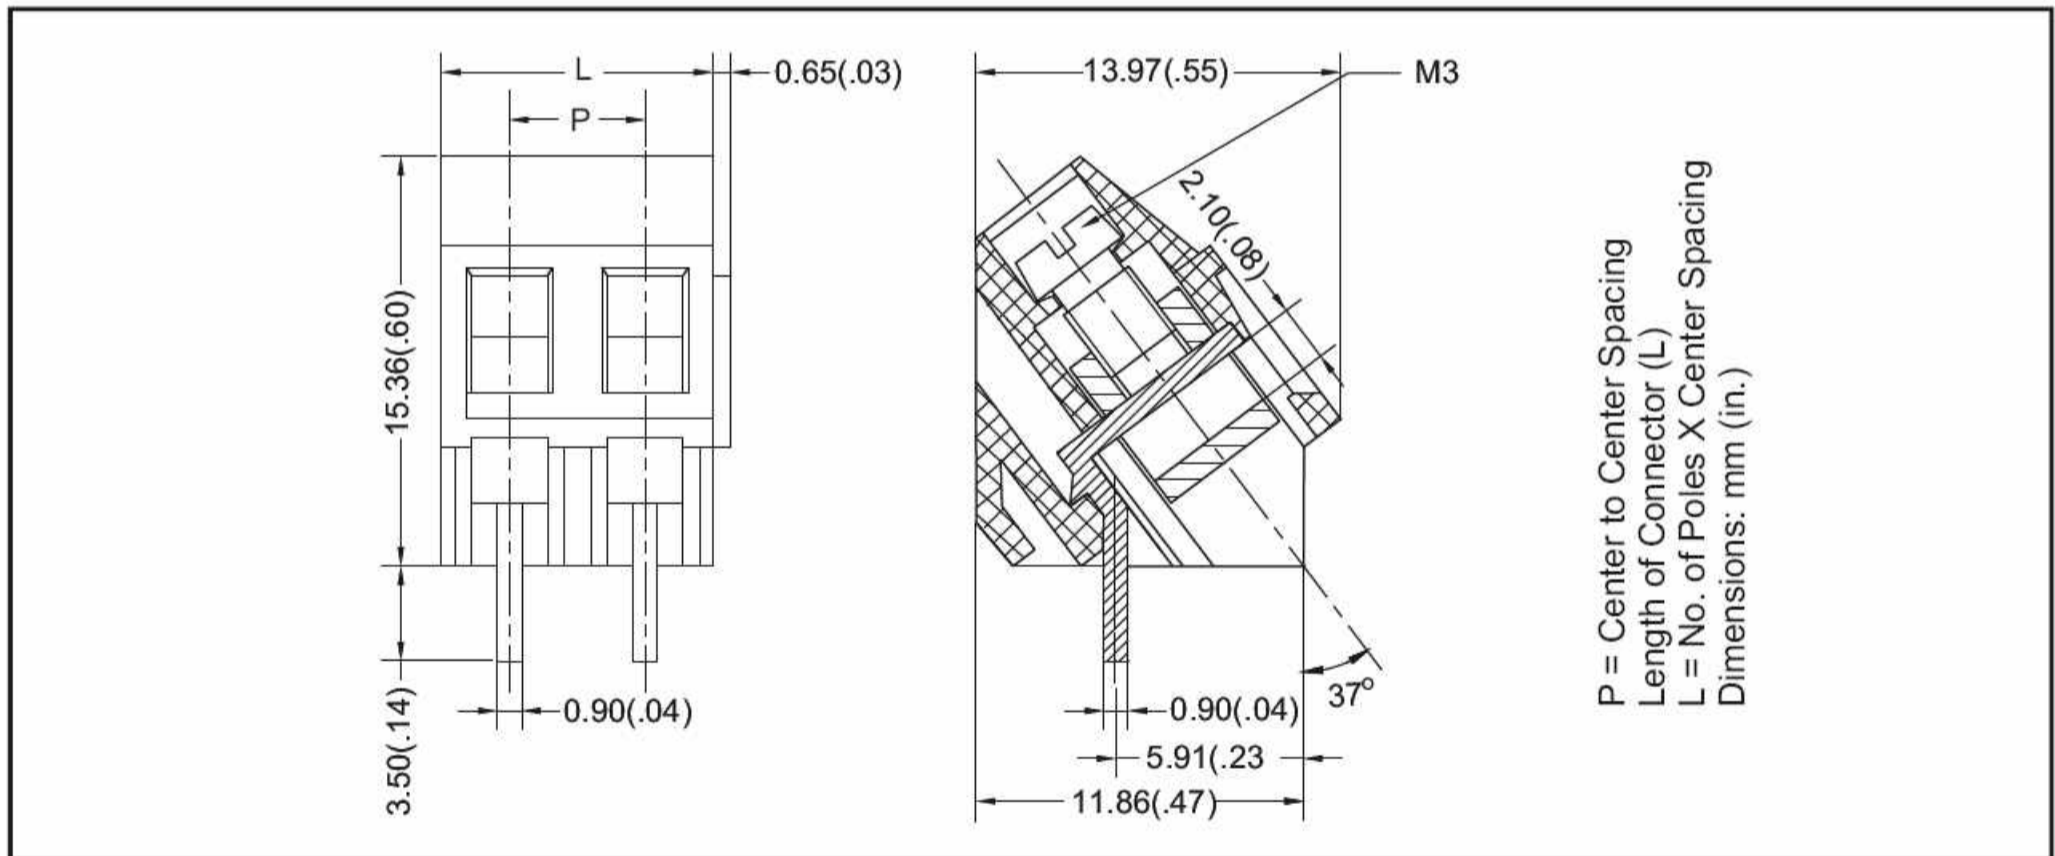

**ORDERING INFORMATION**

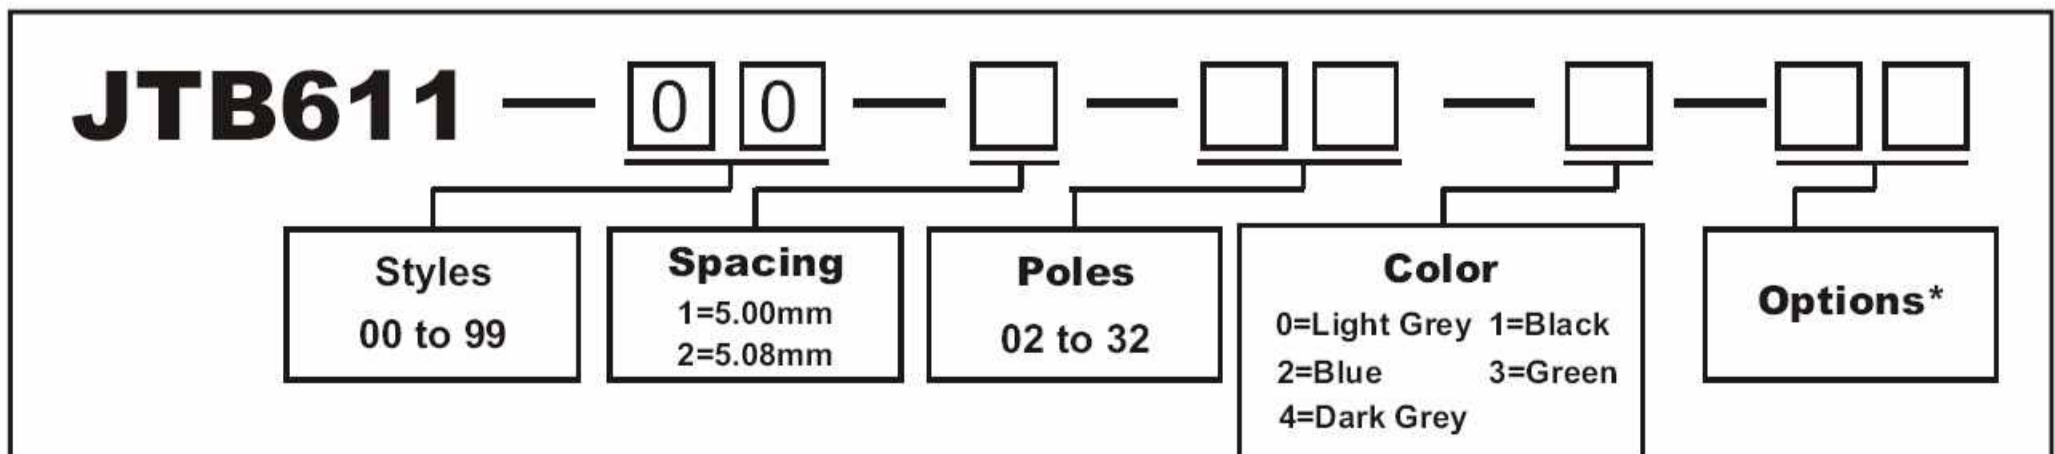

**Options\*:** M1~M9, For Customer Modification (Please provide sketch).  
If more than one option is required, please separate each option with a dash (-).