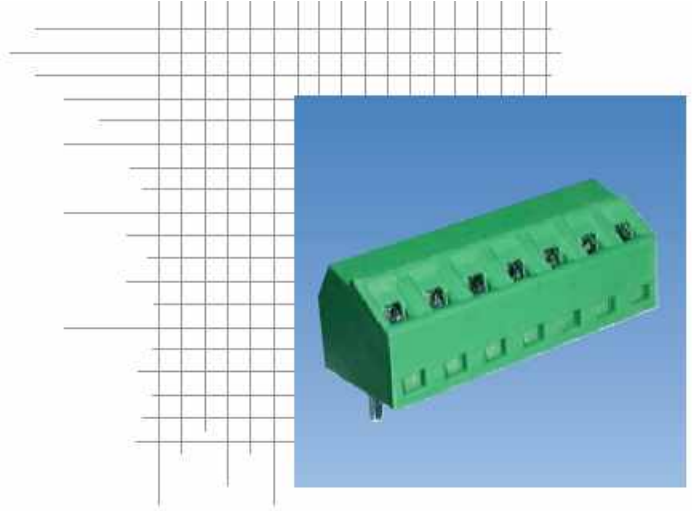

EURO
TERMINAL BLOCK

TYPE JTB611

SPECIFICATIONS

WIRE ENTRANCE: .....55° to PCB
CENTER SPACING: .....3.50mm / 0.138 in.
WIRE RANGE: .....16--30 AWG
ELECTRICAL RATING: 300V, 10A
BREAKDOWN VOLTAGE: 2,500V
MOLDING: Polyamide,UL94,V-0
Self Extinguishing

MAX. TORQUE: .....2 lb-in.
WIRE CAGE: .....Brass, Ni Plated
SCREW: .....M2, Steel, Zinc Plated
TERMINAL : .....Brass, Tin Plated
OPERATING: .....-40°C to +105°C
-40°F to + 221°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

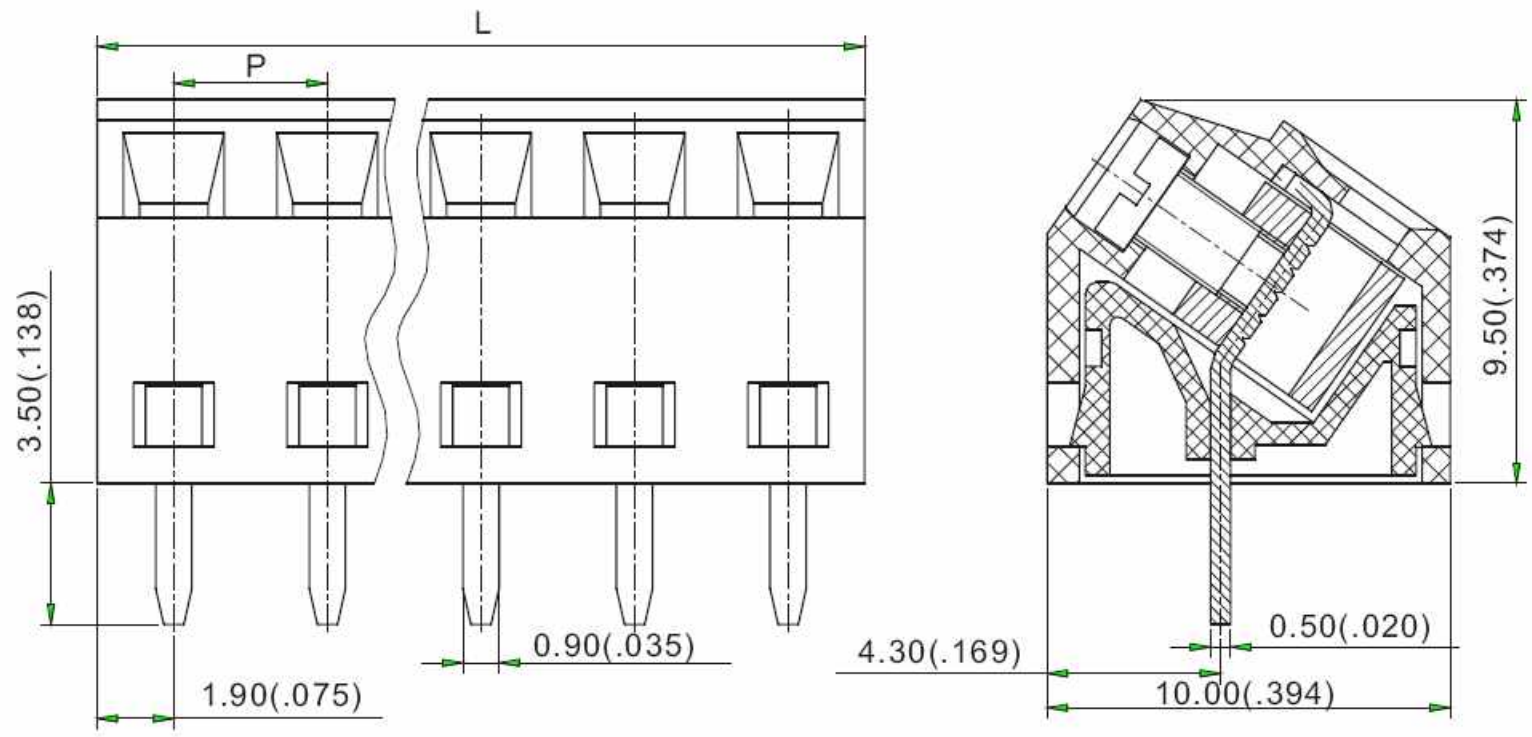

ORDERING INFORMATION

JTB611 — 0 1 — □ □ — □ — □ □

Styles
00 to 99

Poles
02 to 24

Color
0=Light Grey 1=Black
2=Blue 3=Green
4=Dark Grey

Options*

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (-).