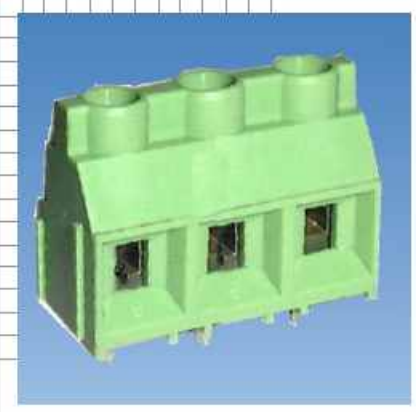

**EURO**
**TERMINAL BLOCK**

# TYPE JTB635

## SPECIFICATIONS

WIRE ENTRANCE: .....Parallel to PCB
CENTER SPACING: .....6.35mm / 0.250 in.
WIRE RANGE: .....30--10 AWG
ELECTRICAL RATING: .....300V, 30A
BREAKDOWN VOLTAGE: .....4,000V
MOLDING: .....Polyamide, UL94, V-0
Self Extinguishing

MAX TORQUE: .....5 lb-in
WIRE CAGE: .....Brass,Ni Plated
SCREW: .....M3,Steel Zinc Plated
TERMINALI .....Brass,Tin Plated
OPERATING: .....-40°C to +105°C
-40°F to + 221°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

## MECHANICAL DIMENSIONS

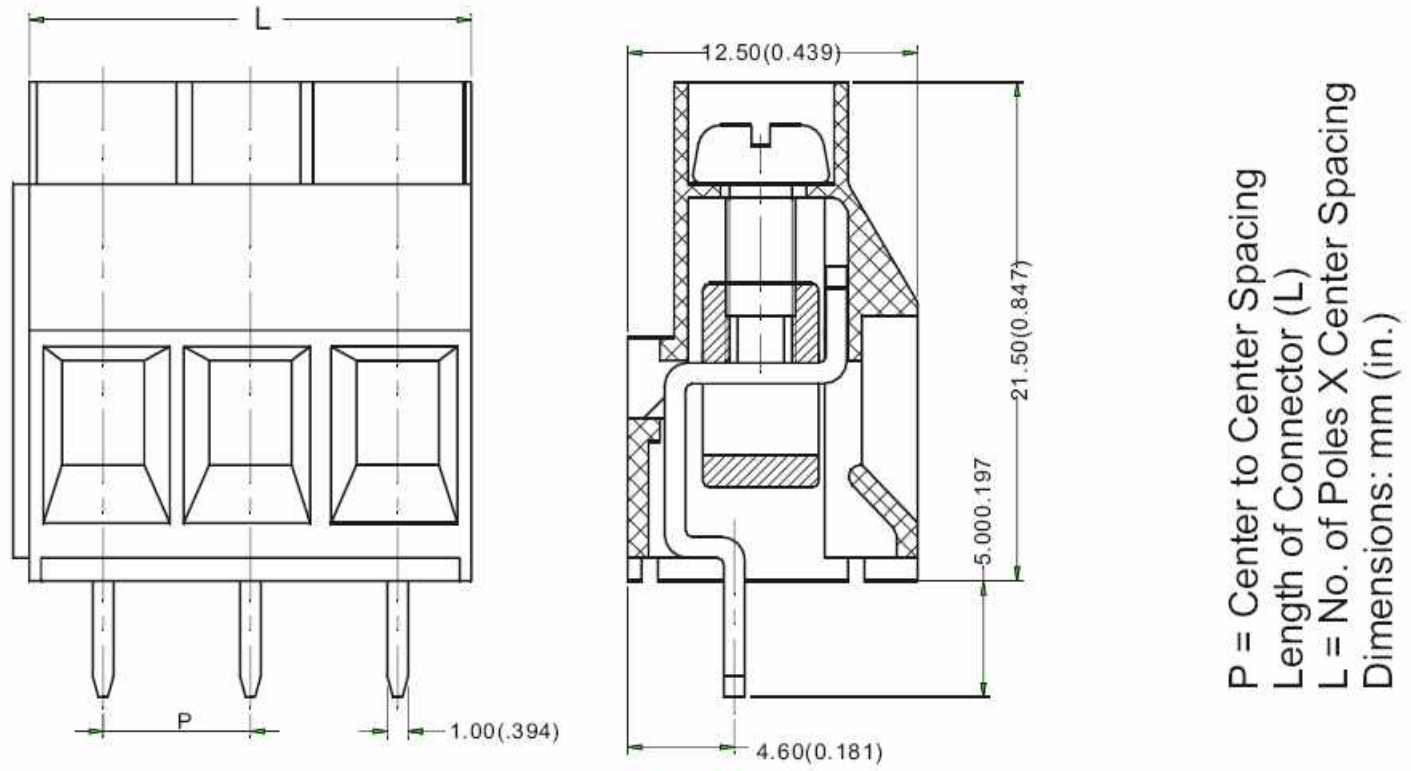


## ORDERING INFORMATION

**JTB635 — 0 0 — □ □ — □ — □ □**

| Styles | Poles | Color | Options* |
|---|---|---|---|
| 00 to 99 | 02 to 03 | 0=Light Grey 1=Black<br>2=Blue 3=Green<br>4=Dark Grey | |

**Options***: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).