EURO
TERMINAL BLOCK

TYPE JTB635

SPECIFICATIONS

WIRE ENTRANCE: .....Parallel to PCB
CENTER SPACING: .....7.62mm / 0.300
WIRE RANGE: .....12--26 AWG
ELECTRICAL RATING: 300V, 15A
BREAKDOWN VOLTAGE: 40,00V
MOLDING: .....Polyamide, UL94, V-0
Self Extinguishing

MAX. TORQUE: .....5 lb-in.
WIRE CAGE:.....Brass,Ni Plated
SCREW:.....M3,Steel Zinc Plated
TERMINAL:.....Brass,Tin Plated
OPERATING: .....-40°C to +105°C
-40°F to + 221°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

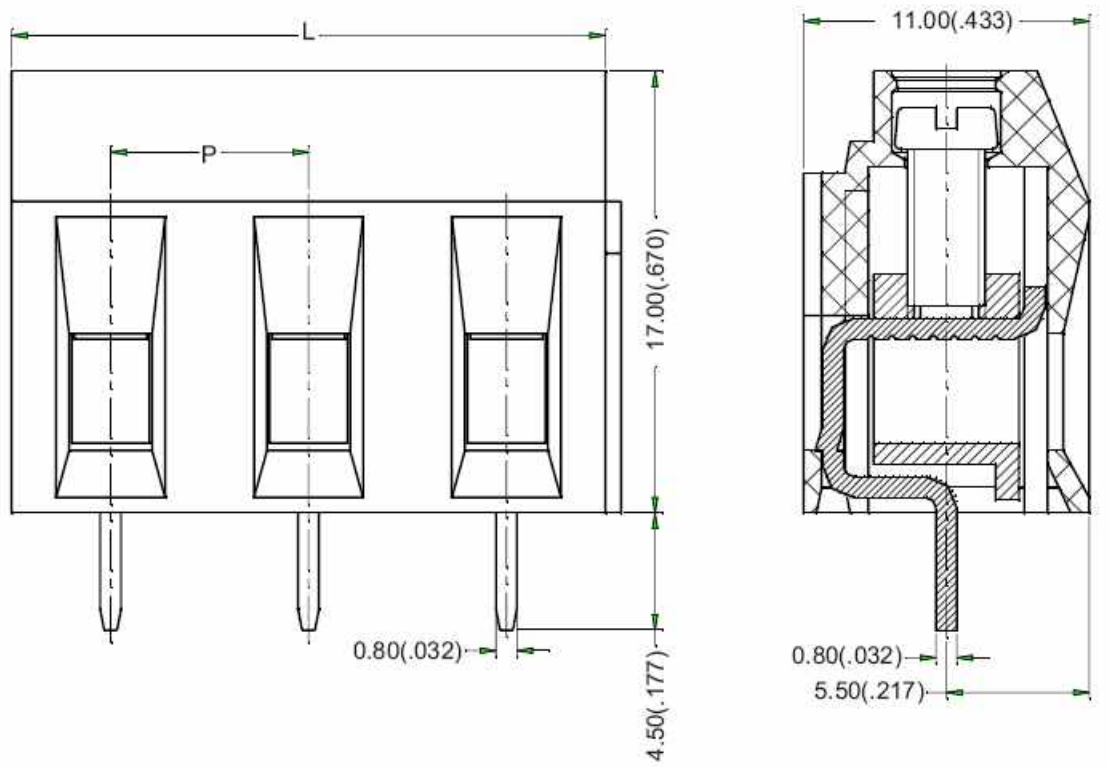

P = Center to Center Spacing
Length of Connector (L)
L = No. of Poles X Center Spacing
Dimensions: mm (in.)

ORDERING INFORMATION

JTB635 — 0 1 — □ — □ □ — □ — □ □

Styles	Spacing	Poles	Color	Options*
00 to 99	P=7.62mm	02 to 03	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).