JTB870-00

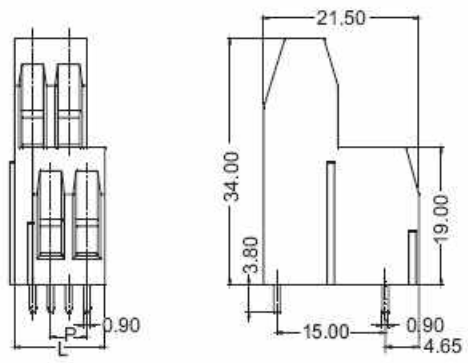

P=Pitch
L=P X Positions+P/2

TECHNICAL DATA	℻:E183240 ㊎:228277
PITCH	5.00mm
WIRE RANGE	30--12AWG
MAX. TORQUE	5lb-in.
ELECTRICAL RATING	300V, 10A
BREAKDOWN VOLTAGE	4,000V
STRIPPING LENGTH	6.00mm

MATERIALS	
INSULATION BODY	Nylon,UL94,V-0
SCREW	M3,Steel,Zinc Plated
TERMINAL	Brass,Tin Plated
WIRE CAGE	Brass,Ni Plated
OPERATING TEMPERATURE	-40°C ~ +105°C
PCB HOLE DIAMETER	ø1.3mm

Positions	L
02	12.50
03	17.50

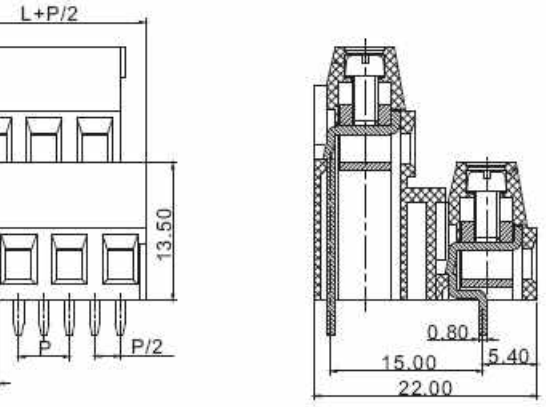

JTB870-02

P=Pitch
L=P X Positions+P/2

TECHNICAL DATA	℻:E183240 ㊎:228277
PITCH	5.00mm
WIRE RANGE	26-12AWG
MAX. TORQUE	5lb-in.
ELECTRICAL RATING	300V, 10A
BREAKDOWN VOLTAGE	4,000V
STRIPPING LENGTH	6.50mm

MATERIALS	
INSULATION BODY	Nylon,UL94,V-0
SCREW	M2.5,Steel,Zinc Plated
TERMINAL	Brass,Tin Plated
WIRE CAGE	Brass,Ni Plated
OPERATING TEMPERATURE	-40°C ~ +105°C
PCB HOLE DIAMETER	ø1.5mm

Positions	L	Positions
02	12.50	
03	17.50	

JTB870-03

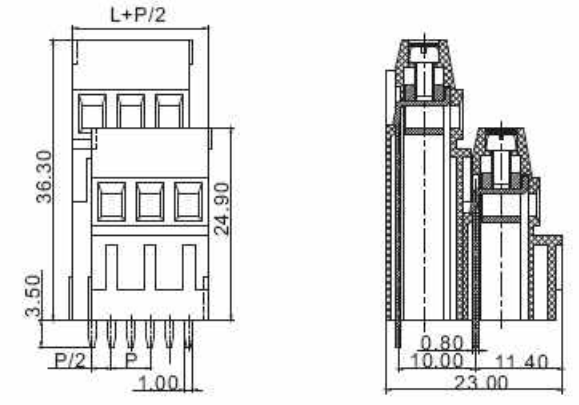

P=Pitch
L=P X Positions+ P/2

TECHNICAL DATA	℻:E183240 ㊎:228277
PITCH	5.00mm
WIRE RANGE	26–12AWG
MAX. TORQUE	5lb-in.
ELECTRICAL RATING	300V, 10A
BREAKDOWN VOLTAGE	4,000V
STRIPPING LENGTH	6.50mm

MATERIALS	
INSULATION BODY	Nylon,UL94,V-0
SCREW	M2.5,Steel,Zinc Plated
TERMINAL	Brass,Tin Plated
WIRE CAGE	Brass,Ni Plated
OPERATING TEMPERATURE	-40°C ~ +105°C
PCB HOLE DIAMETER	ø1.5mm

Positions	L	Positions
02	12.50	
03	17.50	

ORDERING INFORMATION

SERIES	STYLE	PITCH	POSITIONS	COLOR	OPTIONS*
JTB□□□	— □□	— □	— □□	— □	— M□□
	00 to 99	1=5.00 2=5.08	02 to 24	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	