


**EURO
TERMINAL BLOCK**




TYPE JTB870

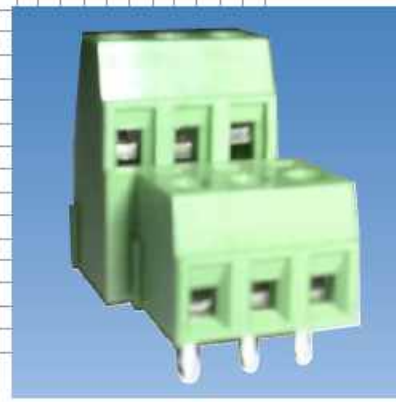


SPECIFICATIONS

WIRE ENTRANCE:Parallel to PCB	MAX. TORQUE:2 lb-in.
CENTER SPACING:3.81mm / .150 in	WIRE CAGE:Brass, Ni Plated
WIRE RANGE:16-30 AWG	TERMINAL:Brass, Tin Plated
ELECTRICAL RATING:300V, 10A	OPERATING:-40°C to +105°C
BREAKDOWN VOLTAGE:2,500V	-40°F to + 221°F
MOLDING:Polyamide, UL94, V-0	MAX. SOLDERING:260°C , +500°F
Self Extinguishing	for 5 seconds

MECHANICAL DIMENSIONS

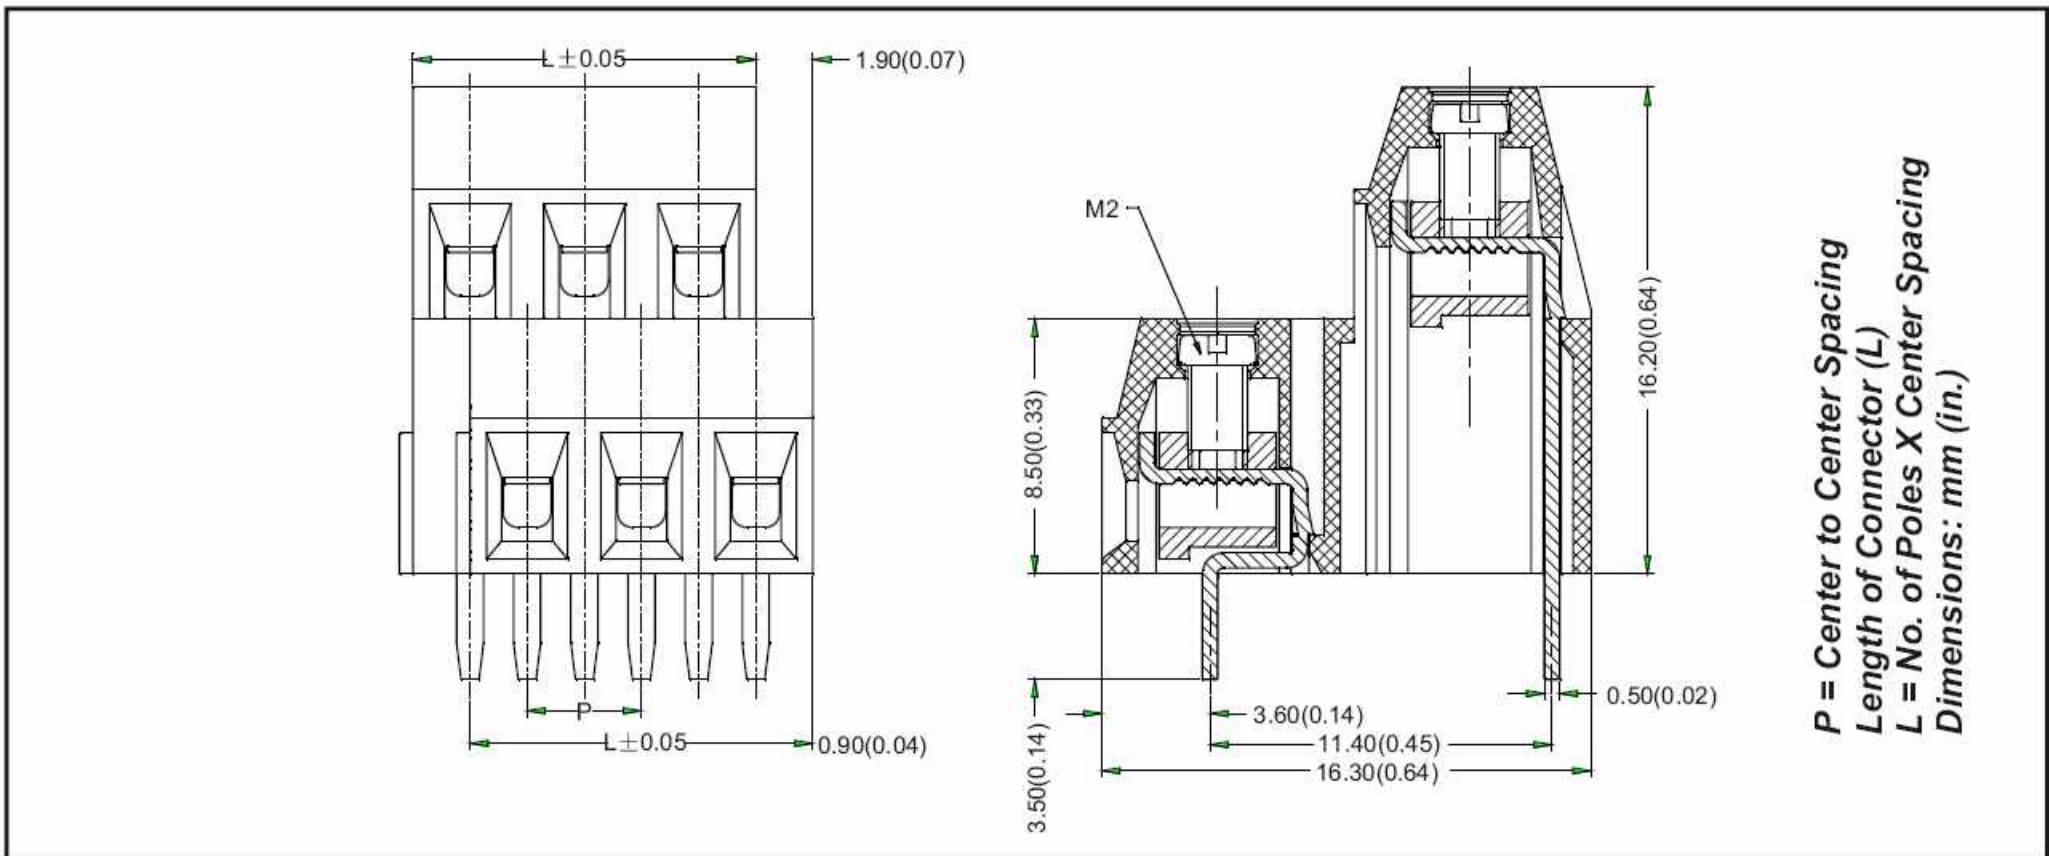

ORDERING INFORMATION

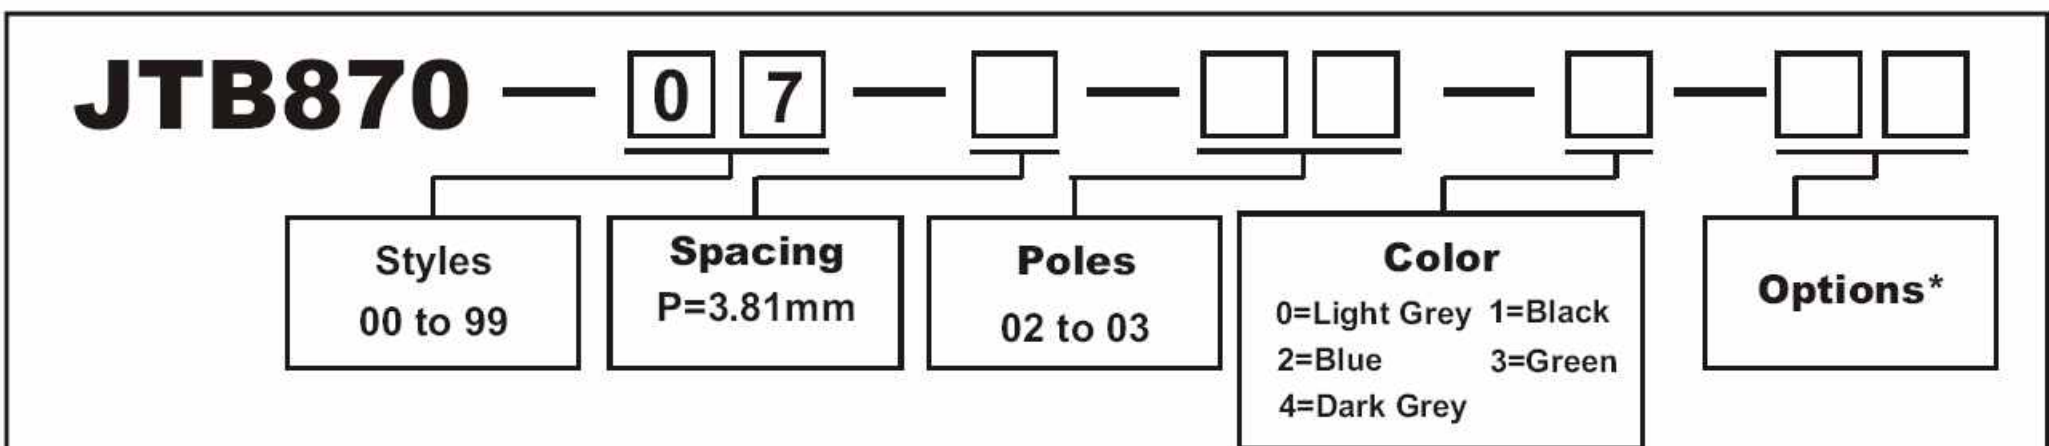

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash ().