

**PLUGGABLE
TERMINAL BLOCK**


TYPE PTB350B




SPECIFICATIONS

WIRE ENTRANCE: Parallel or Vertical to PCB	MAX. TORQUE: 2 lb-in.
CENTER SPACING: 3.81mm / 0.150in.	WIRE PROTECTOR: Bronze, Ni Plated
WIRE RANGE: 16--24 AWG	SCREW: M2, Steel, Zinc Plated
ELECTRICAL RATING: 300V, 8A	WIRE CAGE: Brass, Ni Plated
BREAKDOWN VOLTAGE: 4,000V	OPERATING: -40°C to +105°C -40°F to + 221°F
MOLDING: Polyamide, UL94, V-0 Self Extinguishing	MAX. SOLDERING: 260°C , +500°F for 5 seconds

MECHANICAL DIMENSIONS

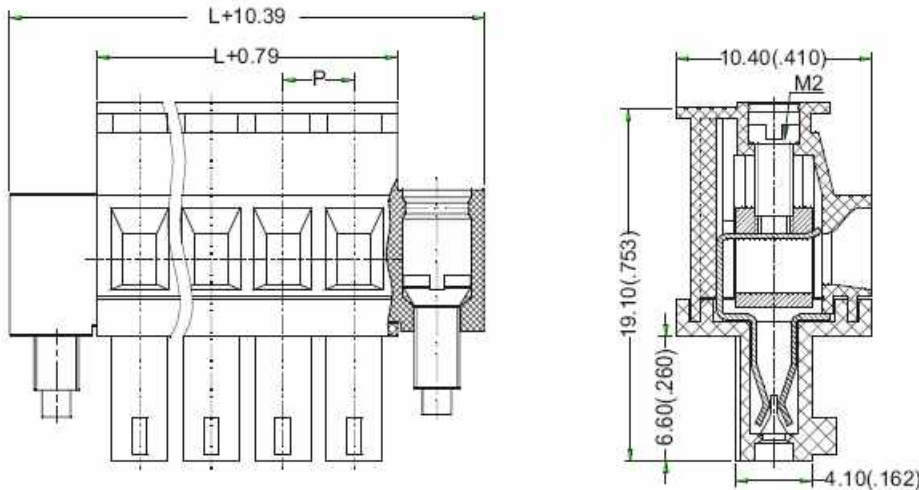

ORDERING INFORMATION

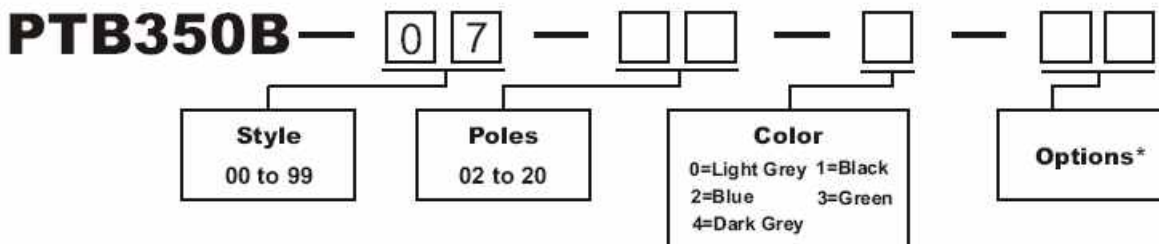

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (-).