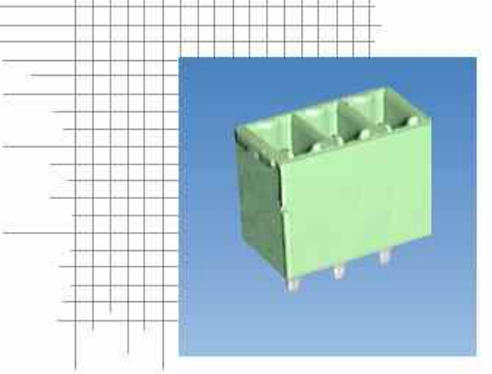

PLUGGABLE TERMINAL BLOCK

TYPE PTB350S

SPECIFICATIONS

WIRE ENTRANCE:	Vertical to PCB
CENTER SPACING:	3.81mm / 0.15i
WIRE RANGE:	14--24 AWG
ELECTRICAL RATING:	300V, 8A
BREAKDOWN VOLTAGE:	4,000V
MOLDING:	Polyamide, UL94, V-0 Self Extinguishing
TERMINAL:	Brass, Tin Plated
TEMPERATURE:	
OPERATING:	-40°C to +105°C -40°F to + 221°F
MAX. SOLDERING:	260°C , +500°F for 5 seconds

MECHANICAL DIMENSIONS

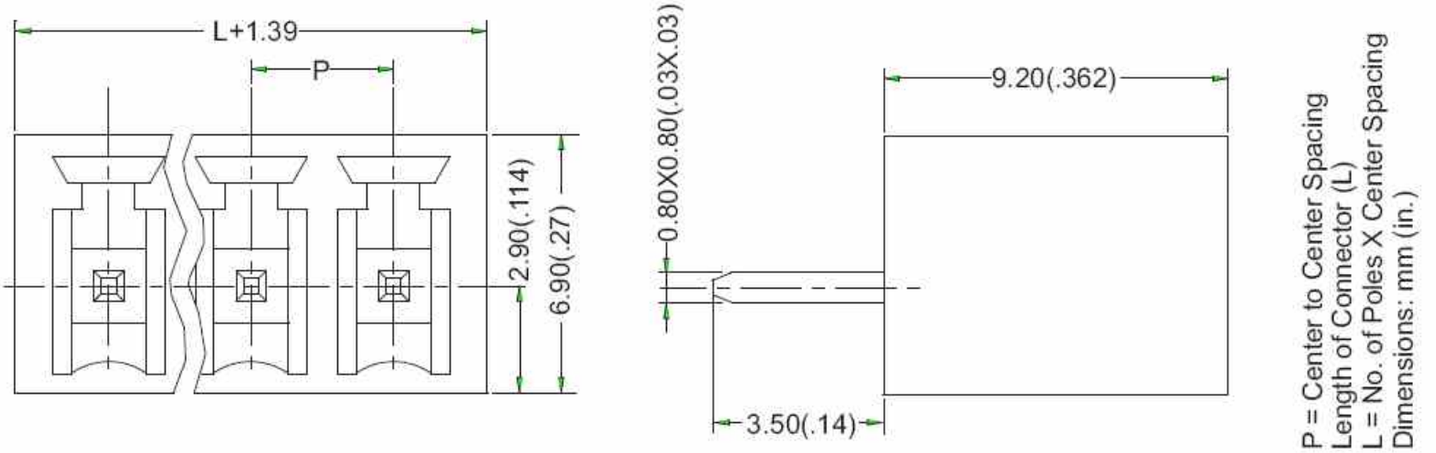

ORDERING INFORMATION

PTB350S — 0 3 — □□ — □ — □□

Style	Poles	Color	Options*
00 to 99	02 to 20	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).