


**PLUGGABLE
TERMINAL BLOCK**

TYPE PTB350S




SPECIFICATIONS




| | |
|--|-------------------------------------|
| WIRE ENTRANCE:Vertical to PCB | TERMINAL:Brass, Tin Plated |
| CENTER SPACING:3.50mm / 0.138in. | TEMPERATURE: |
| ELECTRICAL RATING:300V, 8A | OPERATING:-40°C to +105°C |
| BREAKDOWN VOLTAGE:4,000V | -40°F to + 221°F |
| MOLDING:Polyamide, UL94, V-0 | MAX. SOLDERING:260°C , +500°F |
| Self Extinguishing | for 5 seconds |

MECHANICAL DIMENSIONS

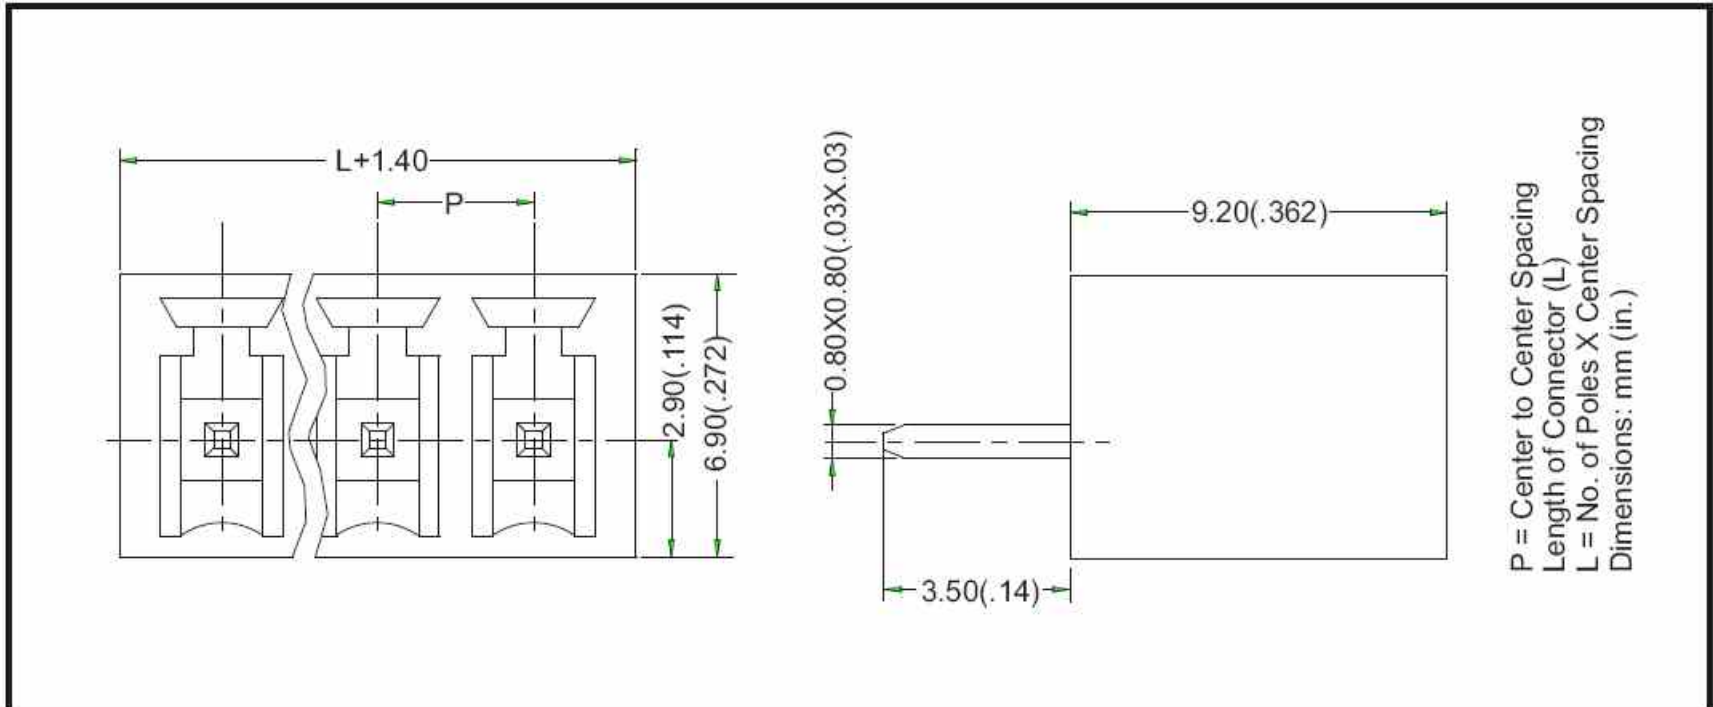

ORDERING INFORMATION

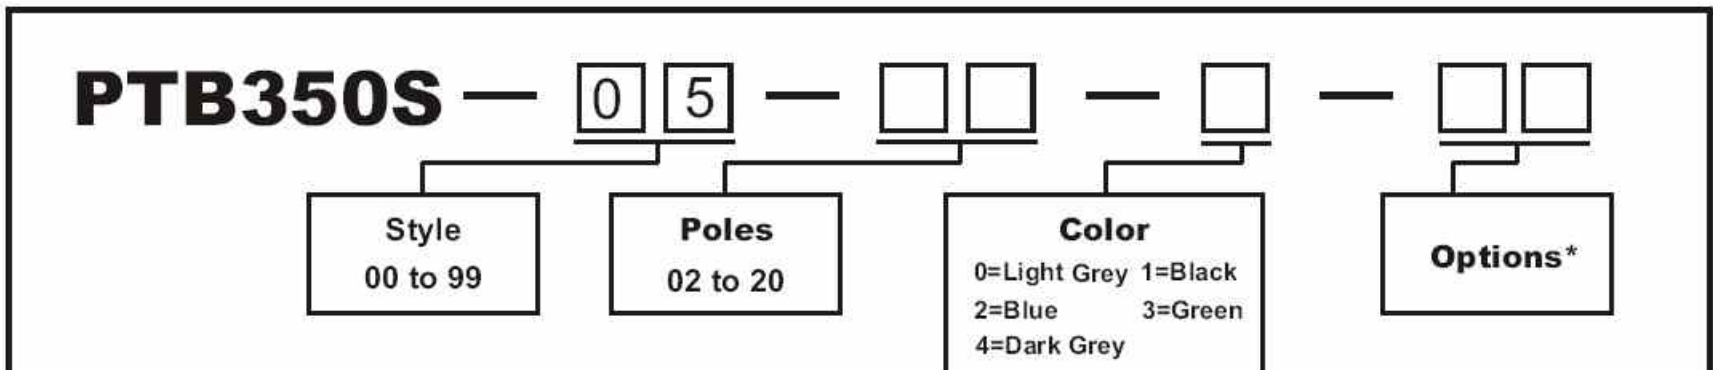

Options*: M1~M9, For Customer Modification (Please provide sketch).
 If more than one option is required, please separate each option with a dash (-).