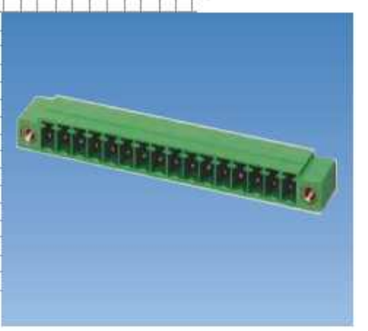

PLUGGABLE
TERMINAL BLOCK

TYPE PTB350S

SPECIFICATIONS

WIRE ENTRANCE: .....Vertical to PCB
CENTER SPACING: .....3.50mm / 0.137in
ELECTRICAL RATING: 300V, 8A
BREAKDOWN VOLTAGE: 4,000V
MOLDING: Pa66, UL94, V-0
Self Extinguishing

TERMINAL: .....Brass, Tin Plated
TEMPERATURE:
OPERATING: .....-40°C to +105°C
-40°F to + 221°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

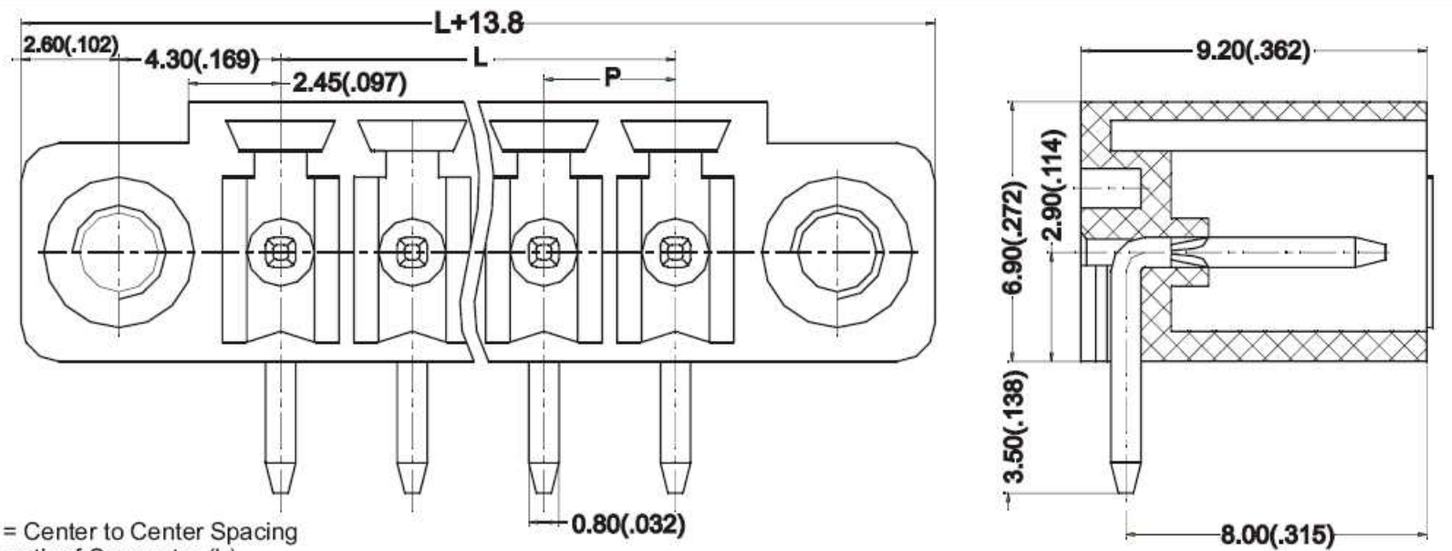

P = Center to Center Spacing
Length of Connector (L)
L = No. of Poles X Center Spacing
Dimensions: mm (in.)

ORDERING INFORMATION

PTB350S — 1 2 — □□ — □ — □□

Style	Poles	Color	Options*
00 to 99	02 to 20	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).