





PTB350S-14




PTB350S-15




PTB350S-16

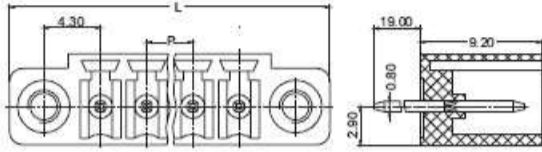

P=Pitch
L=P X Position+13.80

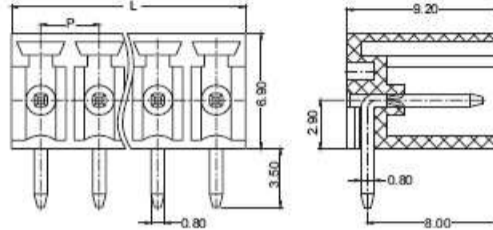

P=Pitch
L=P X Position

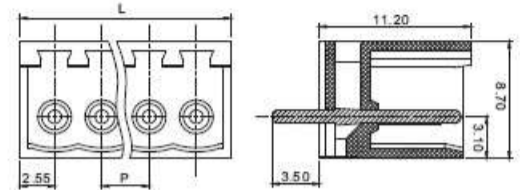

P=Pitch
L=(N-1) X P+3.70mm

TECHNICAL DATA :E183240

PITCH	3.50mm
ELECTRICAL RATING	300V, 8A
BREAKDOWN VOLTAGE	4,000V

MATERIALS

INSULATION BODY	Nylon,UL94,V-0
TERMINAL	Brass,Tin Plated
OPERATING TEMPERATURE	-40°C ~ +105°C
PCB HOLE DIAMETER	ø1.3mm

TECHNICAL DATA :E183240

PITCH	3.50mm
ELECTRICAL RATING	300V, 8A
BREAKDOWN VOLTAGE	4,000V

MATERIALS

INSULATION BODY	Nylon,UL94,V-0
TERMINAL	Brass,Tin Plated
OPERATING TEMPERATURE	-40°C ~ +105°C
PCB HOLE DIAMETER	ø1.3mm

TECHNICAL DATA :228277

PITCH	3.50mm
ELECTRICAL RATING	300V, 10A
BREAKDOWN VOLTAGE	4,000V

MATERIALS

INSULATION BODY	Nylon,UL94,V-0
WIRE CAGE	Brass,Ni Plated
OPERATING TEMPERATURE	-40°C ~ +105°C

*MATE WITH PLUG: PTB350B-09

*MATE WITH PLUG: PTB350B-05

Positions	L	Positions	L
02	20.80	18	76.80
03	24.30	19	80.30
04	27.80	20	83.80
05	31.30		
06	34.80		
07	38.30		
08	41.80		
09	45.30		
10	48.80		
11	52.30		
12	55.80		
13	59.30		
14	62.80		
15	66.30		
16	69.80		
17	73.30		

Positions	L	Positions	L
02	7.00	18	63.00
03	10.50	19	66.50
04	14.00	20	70.00
05	17.50		
06	21.00		
07	24.50		
08	28.00		
09	31.50		
10	35.00		
11	38.50		
12	42.00		
13	45.50		
14	49.00		
15	52.50		
16	56.00		
17	59.50		

Positions	L
02	7.20
03	10.70
04	14.20
05	17.70
06	21.20
07	24.70
08	28.20
09	31.70
10	35.20
11	38.70
12	42.20
13	45.70
14	49.20
15	52.70
16	56.20
17	59.70
18	63.20

ORDERING INFORMATION

SERIES **STYLE** **POSITIONS** **COLOR** **OPTIONS***

PTB □ □ □ **S** — □ □ — □ □ — □ — M □ □

00 to 99 02 to 24

0=Light Grey
1=Black
2=Blue
3=Green
4=Dark Grey