



**PLUGGABLE
TERMINAL BLOCK**


TYPE PTB450B




SPECIFICATIONS

WIRE ENTRANCE:Parallel to PCB	MAX. TORQUE:3 lb-in.
CENTER SPACING:5.00mm / 0.197 in.	WIRE PROTECTOR:Bronze, Ni Plated
WIRE RANGE:14–24 AWG	SCREW:M2.5, Steel, Zinc Plated
ELECTRICAL RATING:300V, 10A	WIRE CAGE:Brass, Ni Plated
BREAKDOWN VOLTAGE:4,000V	OPERATING:-40°C to +105°C
MOLDING:Polyamide, UL94, V-0	MAX. SOLDERING:260°C , +500°F
Self Extinguishing	for 5 seconds

MECHANICAL DIMENSIONS

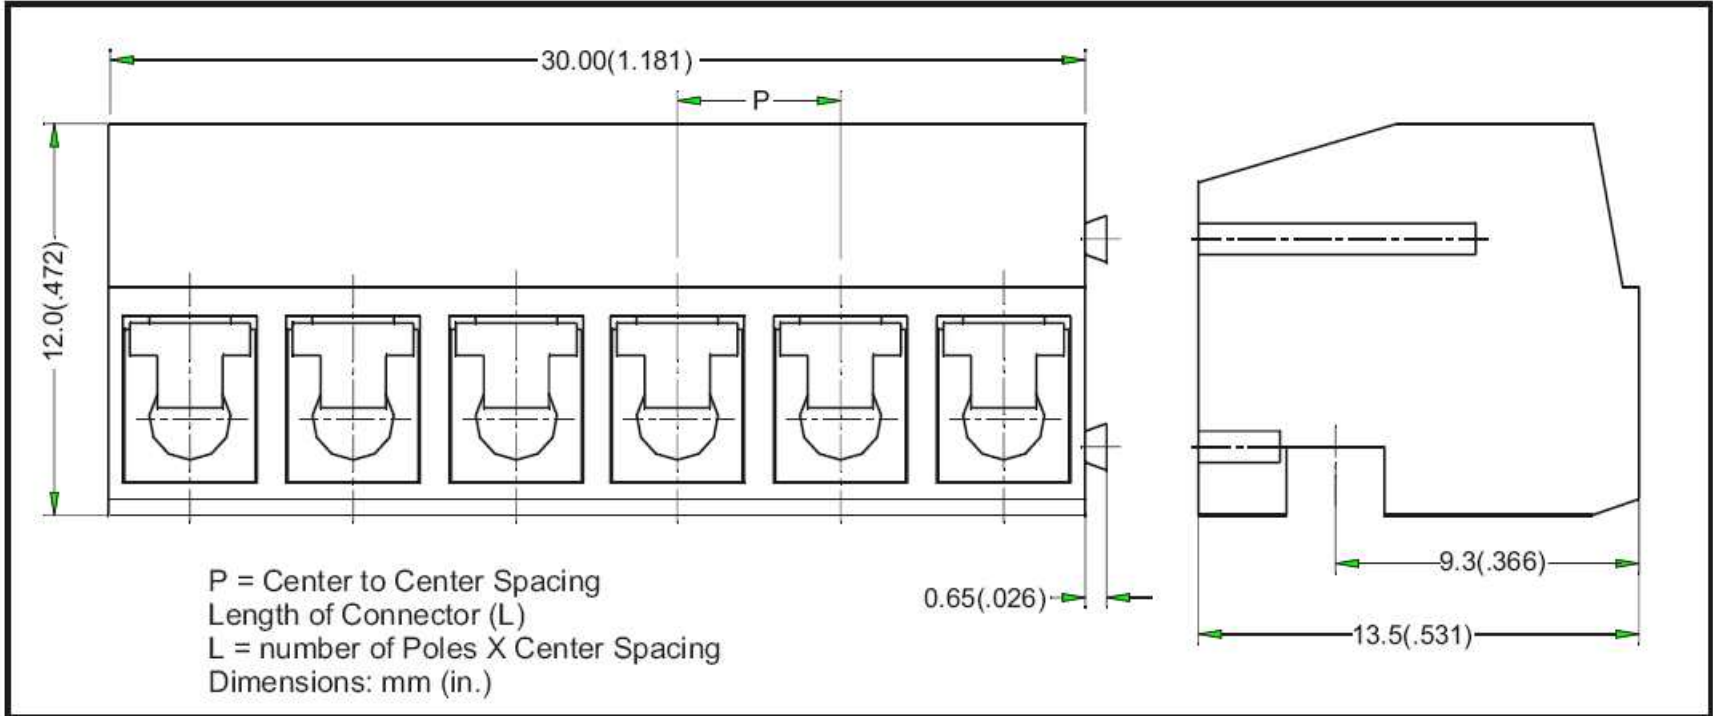

ORDERING INFORMATION

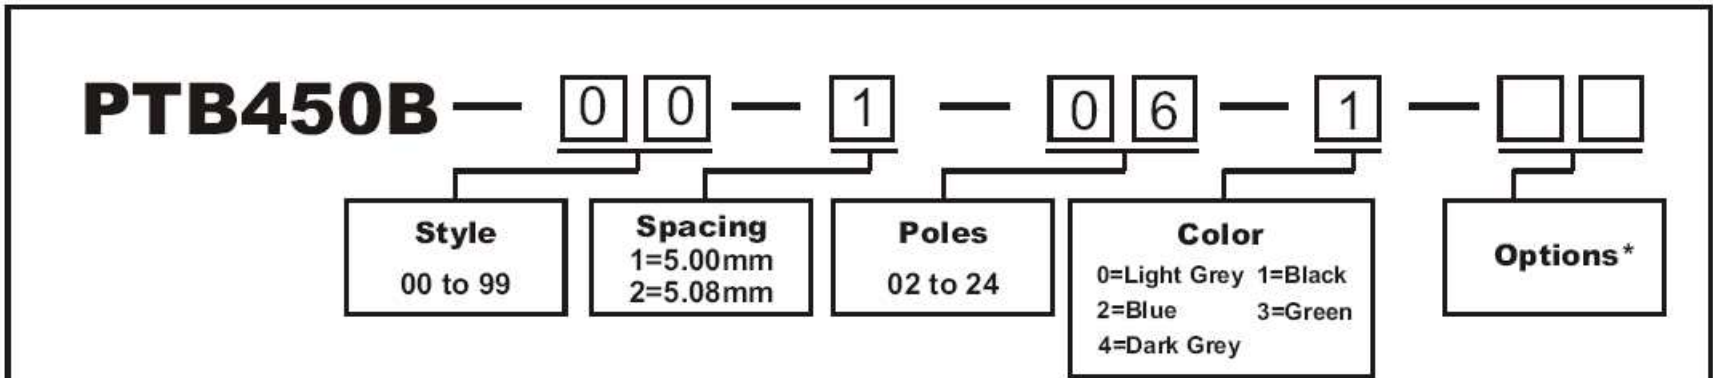

Options*: M1~M9, For Customer Modification (Please provide sketch).
 If more than one option is required, please separate each option with a dash (-).