



**PLUGGABLE
TERMINAL BLOCK**


TYPE PTB450B



SPECIFICATIONS


WIRE ENTRANCE:Parallel to PCB	MAX. TORQUE:7 lb-in.
CENTER SPACING:5.00mm / 0.197 in.	WIRE PROTECTOR:Bronze , Tin Plated
WIRE RANGE:14--24AWG	SCREW:M3, Steel, Zinc Plated
ELECTRICAL RATING:300V, 10A	BLOCK:Brass, Ni Plated
BREAKDOWN VOLTAGE:4,000V	OPERATING:-40°C to +105°C
MOLDING:PA66, UL94, V-0-40°F to + 221°F
Self Extinguishing	

MECHANICAL DIMENSIONS

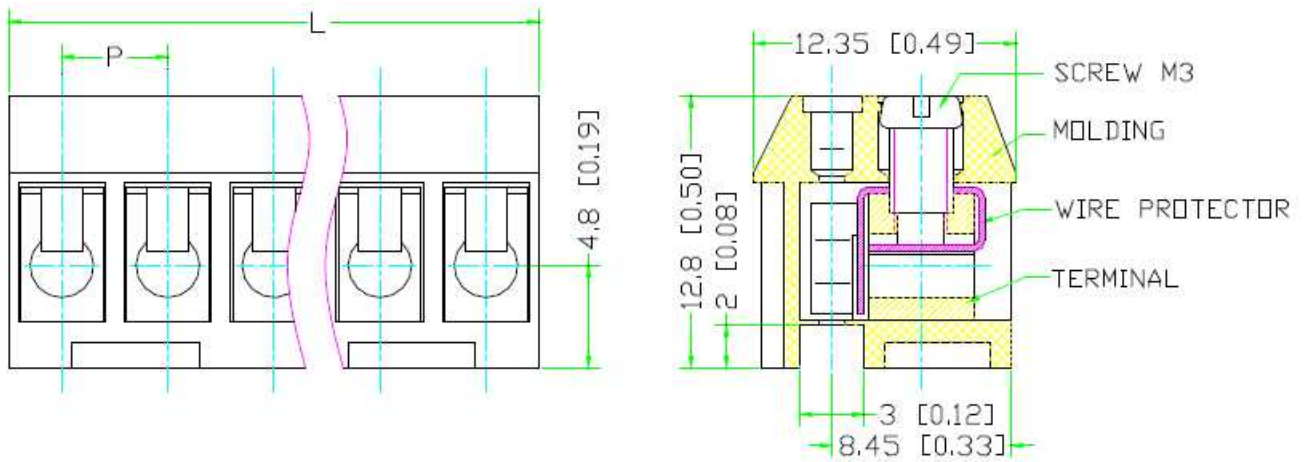

*P = Center to Center Spacing
Length of Connector (L)
L = number of Poles X Center Spacing
Dimensions: mm (in.)*

ORDERING INFORMATION

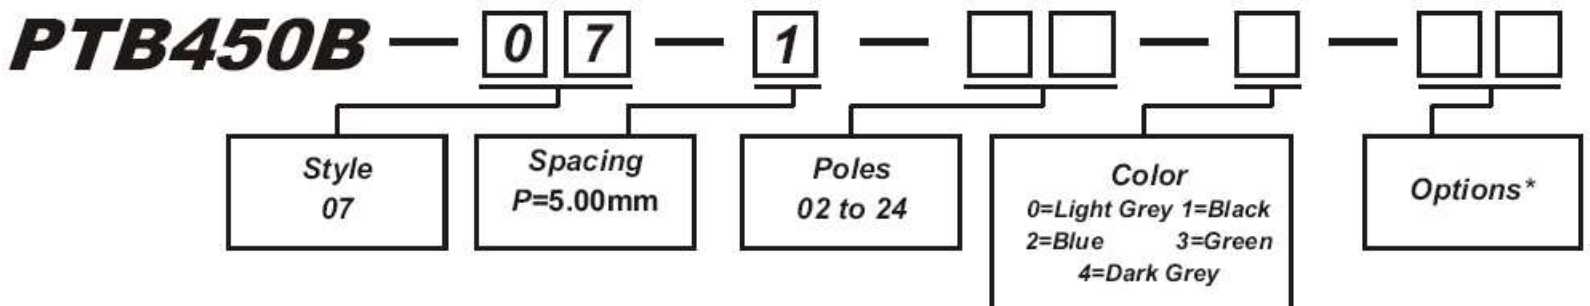

Options*: M#, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (-).