PLUGGABLE
TERMINAL BLOCK

TYPE PTB552B

SPECIFICATIONS

WIRE ENTRANCE: .....Parrallel to PCB
CENTER SPACING: .....8.00mm / 0.315 in.
WIRE RANGE: .....16--22 AWG
ELECTRICAL RATING: 300V, 10A
BREAKDOWN VOLTAGE: 4,000V
MOLDING: .....PBT+GF15%,UL94,V-0
Self Extinguishing

MAX. TORQUE: .....10 lb-in.
WIRE PROTECTOR: .....Phos Bronze, Tin Plated
SCREW: .....M3.5, Steel, Zinc Plated
TERMINAL:..... .....Brass, Tin Plated
OPERATING: .....-40°C to +120°C
-40°F to + 248°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

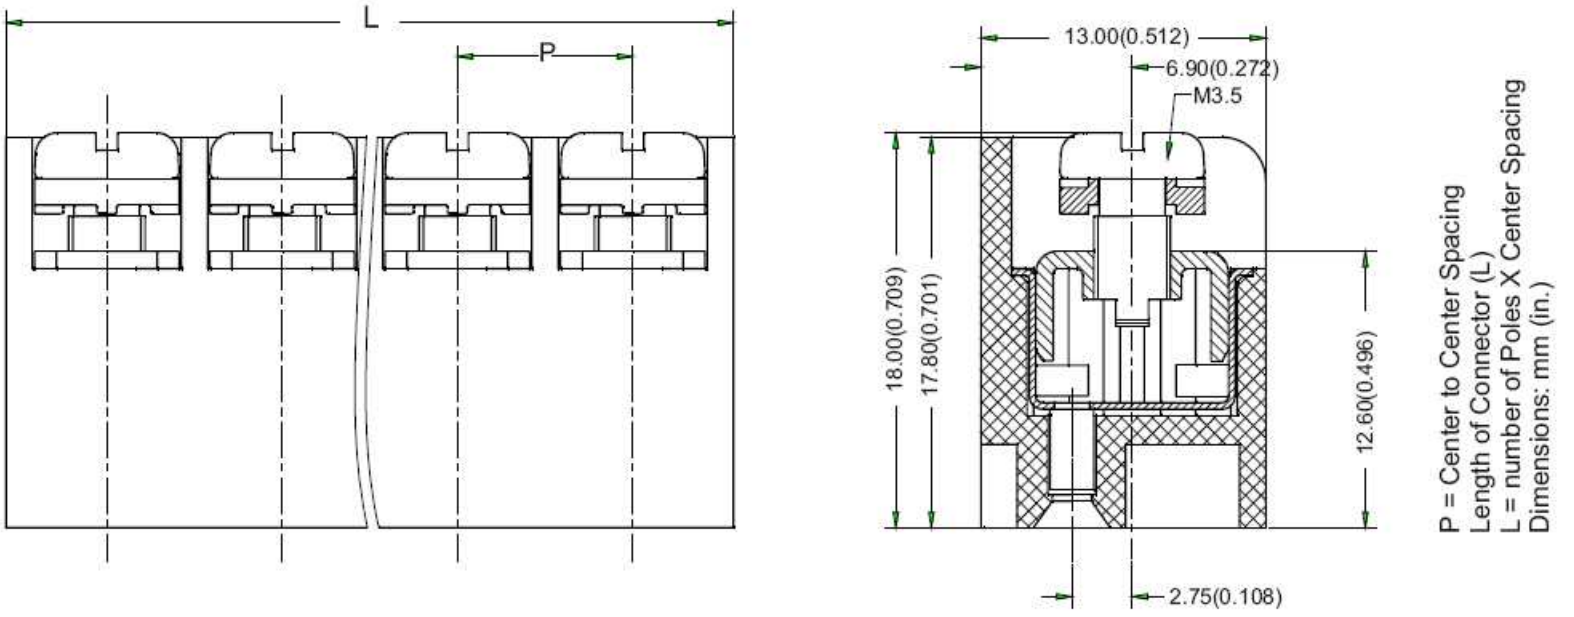

ORDERING INFORMATION

PTB552B— 0 0 — □ — □ □ — □ — □ □

Style	Spacing	Poles	Color	Options*
00 to 99	P=8.00mm	02 to 12	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).