




**PLUGGABLE
TERMINAL BLOCK**


**TYPE PTB650B
SPECIFICATIONS**

WIRE ENTRANCE:Parallel to PCB	MAX. TORQUE:5 lb-in.
CENTER SPACING:5.00mm / 0.197 in.	WIRE PROTECTOR:Bronze, Ni Plated
WIRE RANGE:12--26AWG	SCREW:M3, Steel, Zinc Plated
ELECTRICAL RATING:300V, 20A	WIRE CAGE:Brass, Ni Plated
BREAKDOWN VOLTAGE:4,000V	OPERATING:-40°C to +105°C
MOLDING:Polyamide, UL94, V-0	MAX. SOLDERING:260°C (+500°F)
Self Extinguishing	for 5 seconds

MECHANICAL DIMENSIONS

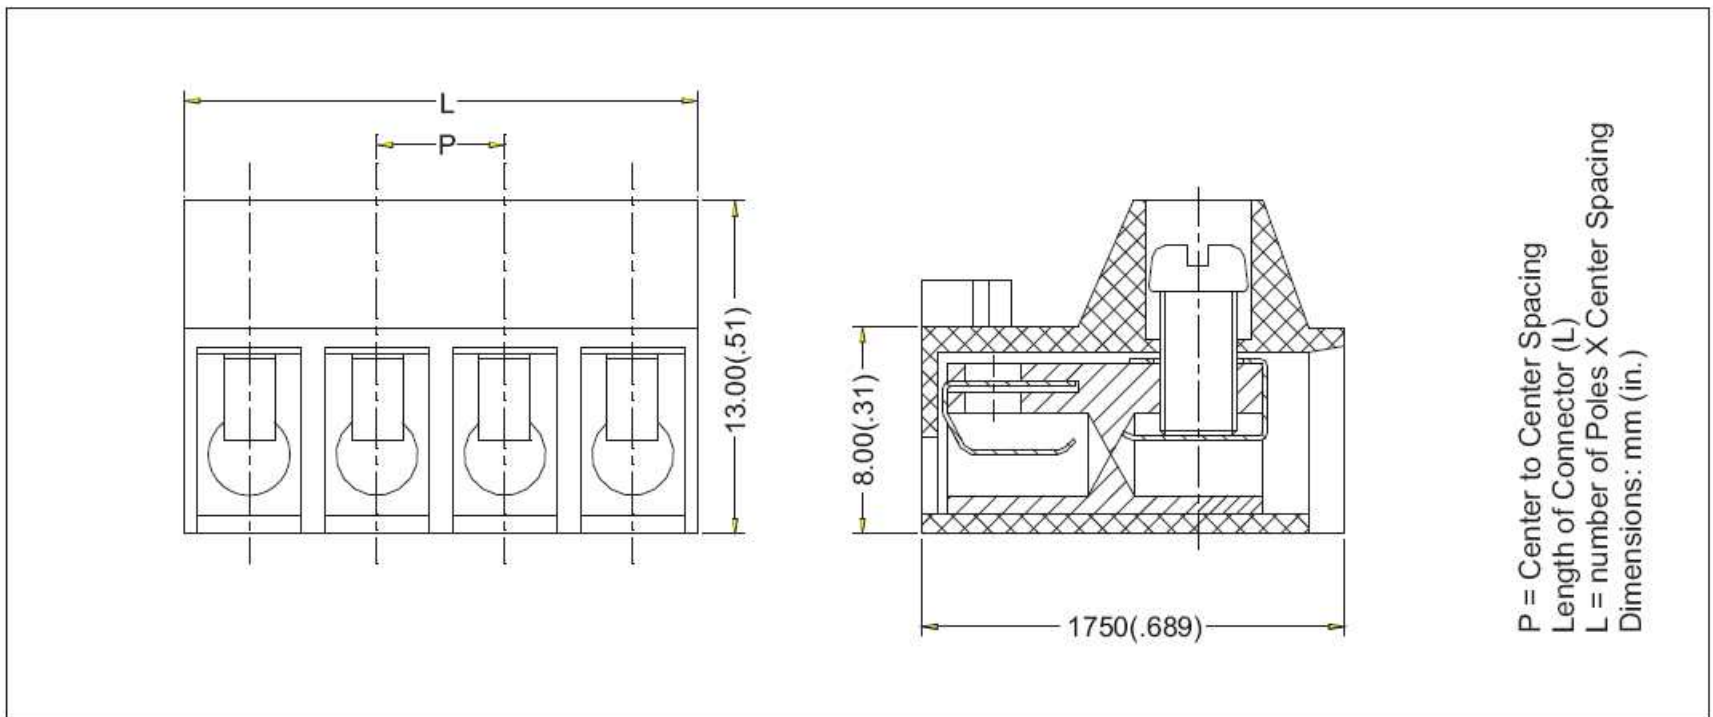

ORDERING INFORMATION

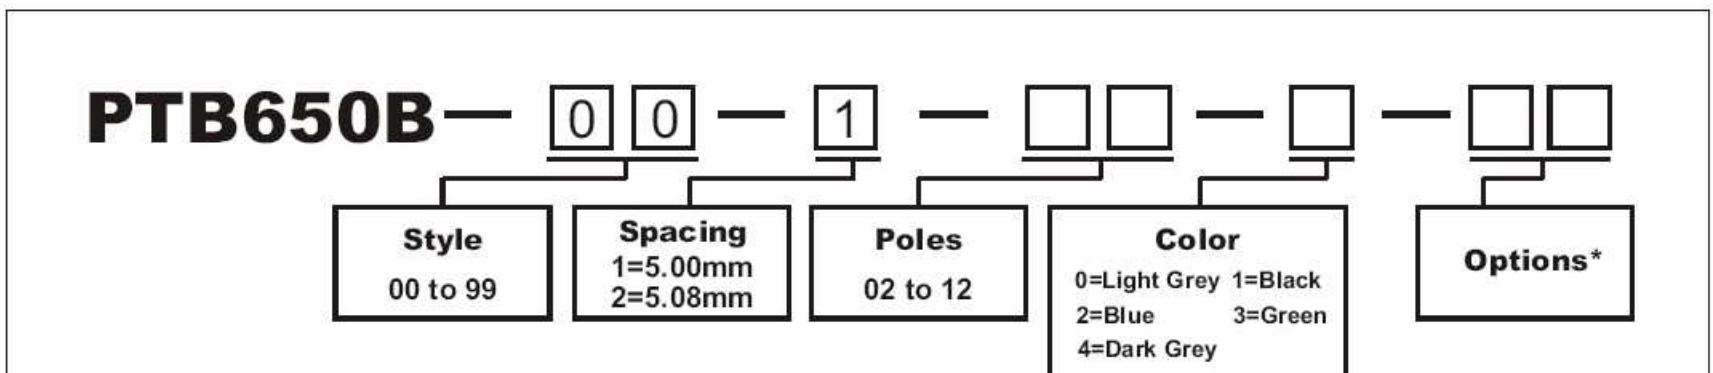

Options*: M1~M9, For Customer Modification (Please provide sketch).
 If more than one option is required, please separate each option with a dash (-).