


**PLUGGABLE
TERMINAL BLOCK**




**TYPE PTB670B
SPECIFICATIONS**

WIRE ENTRANCE:Parallel to PCB	MAX. TORQUE:10 lb-in.
CENTER SPACING:10.16mm / 0.400 in.	CONTACT:Steel, Zin Plated
WIRE RANGE:12--22 AWG	SCREW:M3.5, Steel, Zinc Plated
ELECTRICAL RATING:300V, 10A	TERMINAL:Brass, Tin Plated
BREAKDOWN VOLTAGE:4,000V	OPERATING:-40°C to +120°C -40°F to + 248°F
MOLDING:PBT+G15%, UL94, V-0 Self Extinguishing	MAX. SOLDERING:260°C , +500°F for 5 seconds

MECHANICAL DIMENSIONS

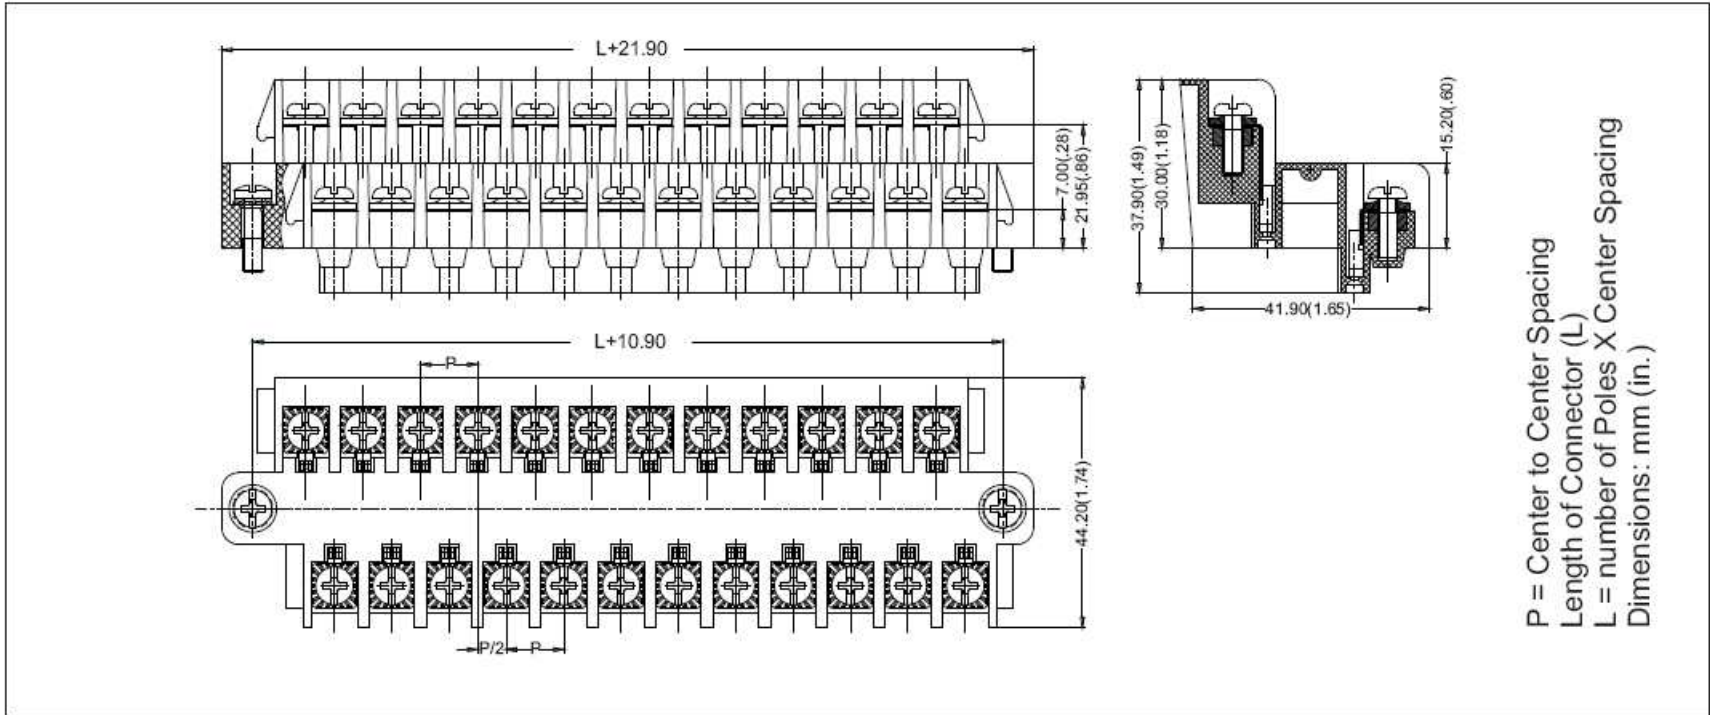

ORDERING INFORMATION

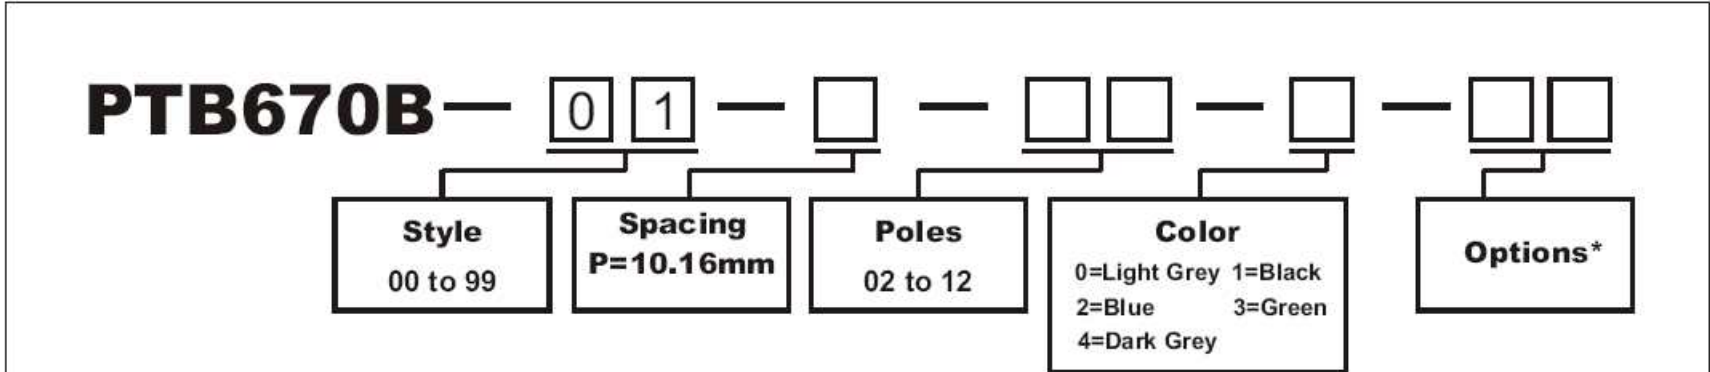

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (-).