




PTB750B-03-5

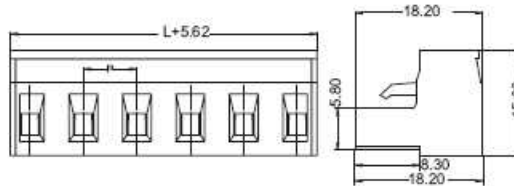

P=Pitch
L=(n-1) x P
N=NO. Of Poles

TECHNICAL DATA

W:E183240 Ⓢ:201660

PITCH	7.62mm
WIRE RANGE	30--12AWG
MAX. TORQUE	5lb-in.
ELECTRICAL RATING	300V, 15A
BREAKDOWN VOLTAGE	4,000V
PEEL LENGTH	

MATERIALS

BODY	PA66,UL94,V-0
SCREW	M3,Steel,Zinc Plated
WIRE PROTECTOR	Tin bronze,Tin plated
WIRE CAGE	Brass,Nickel Plated
OPERATING	-40°C ~ +105°C

MATE WITH HEADER: **PTB750S-02-5**

Poles	L	Poles	L
02	7.62		
03	15.24		
04	22.86		
05	30.48		
06	38.10		
07	45.72		
08	53.34		
09	60.96		
10	68.58		
11	76.20		
12	83.82		

ORDERING INFORMATION

PTB750B	Style	Pitch	Poles	Color	Options*
	0 3	5			M
	00 to 99	1=5.00mm 2=5.08mm 3=6.35mm 4=7.50mm 5=7.62mm	02 to 24	Color 0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M1~M9, For Customer Modification (Please provide sketch).

If more than one option is required, please separate each option with a dash (-).