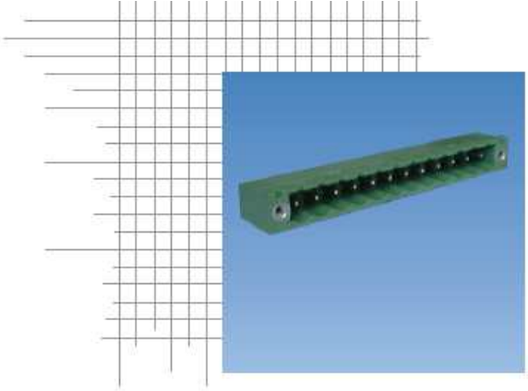

PLUGGABLE
TERMINAL BLOCK

TYPE PTB750S

SPECIFICATIONS

WIRE ENTRANCE: .....Parallel to PCB
CENTER SPACING: .....5.08mm / 0.200in.

ELECTRICAL RATING: 300V, 10A
BREAKDOWN VOLTAGE: 4,000V
MOLDING: .....Polyamide, UL94, V-0
Self Extinguishing

TERMINAL: .....Brass, Tin Plated
TEMPERATURE:
OPERATING: .....-40°C to +120°C
-40°F to + 248°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

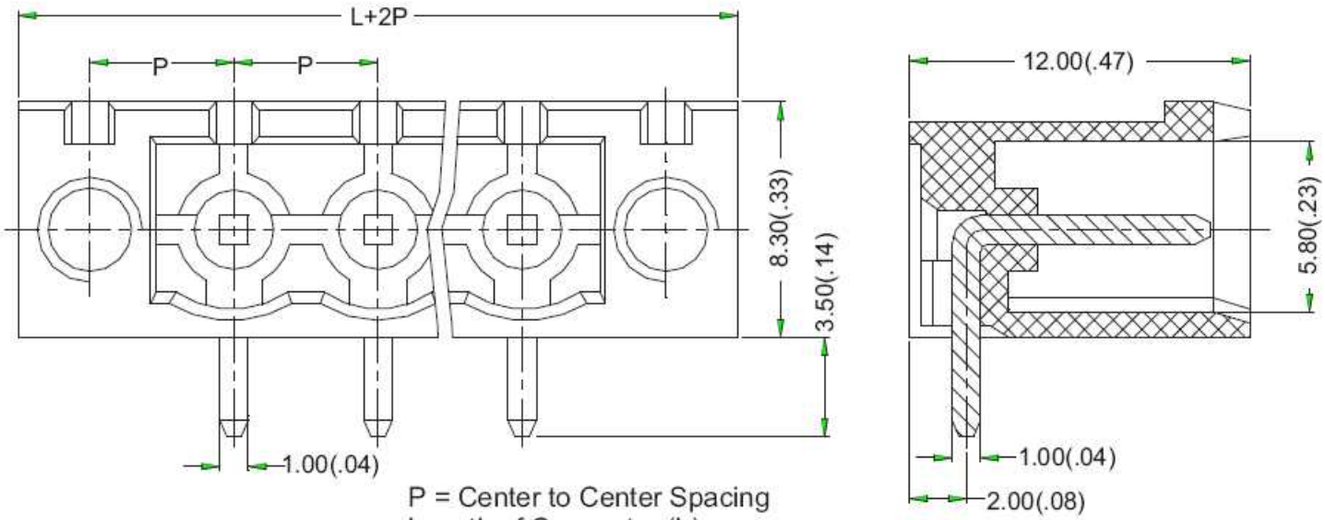

P = Center to Center Spacing
Length of Connector (L)
L = No. of Poles X Center Spacing
Dimensions: mm (in.)

ORDERING INFORMATION

PTB750S — 0 4 — □ — □□ — □ — □□

Style	Spacing	Poles	Color	Options*
00 to 99	1=5.00mm 2=5.08mm	02 to 24	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).