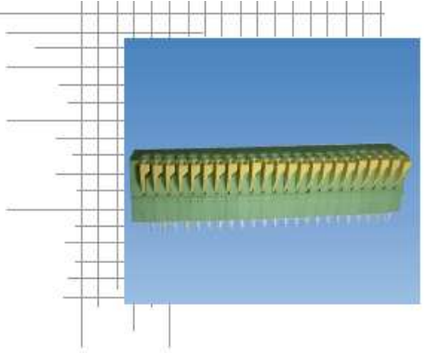

SPRING
TERMINAL BLOCK

TYPE STB250

SPECIFICATIONS

CENTER SPACING: .....2.54mm / 0.10 in.
WIRE RANGE: .....20--26 AWG
ELECTRICAL RATING: 150V, 6A
BREAKDOWN VOLTAGE: 2,500V
MOLDING: PA66, UL94, V-0
Self Extinguishing

CAGE CLAMP: .....Steel, Ni Plated
TERMINAL: .....Brass, Tin Plated
OPERATING: .....-40°C to +105°C
-40°F to + 221°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

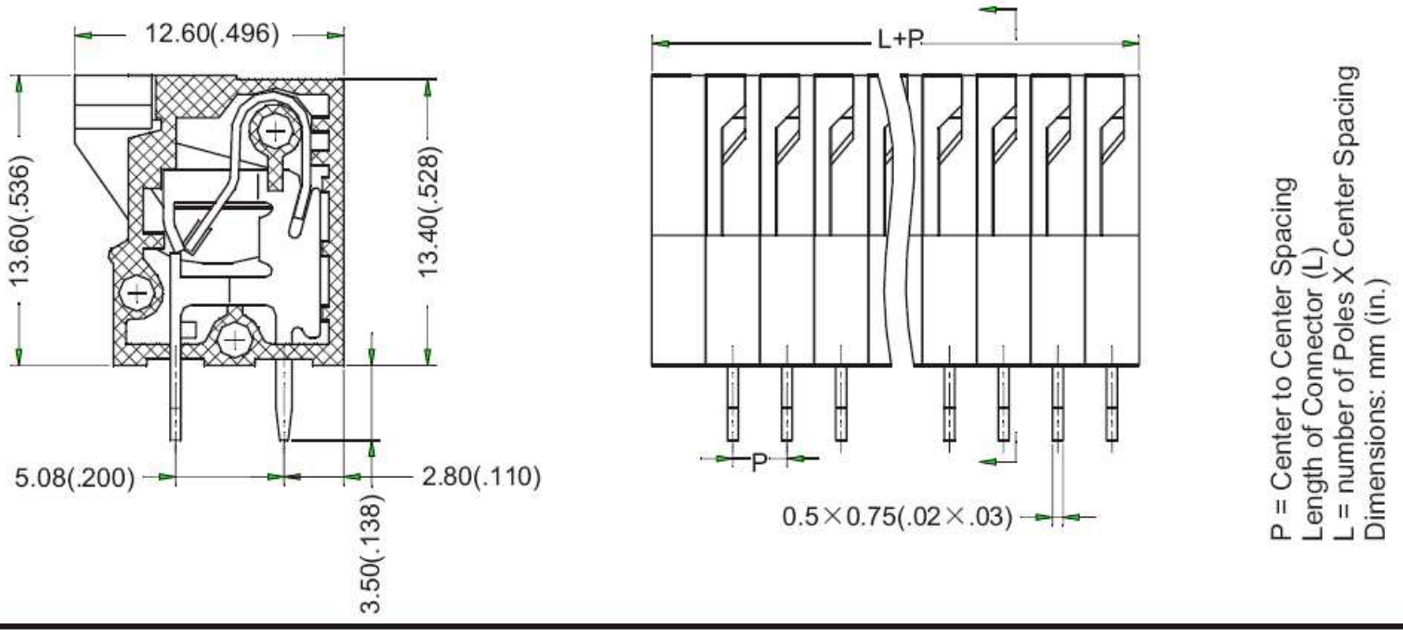

ORDERING INFORMATION

STB250 — 0 1 — □ □ — □ — □ □

Style	Poles	Color	Options*
00 to 99	02 to 24	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M1~M9, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (–).