


**SPRING
TERMINAL BLOCK**

TYPE STB710


SPECIFICATIONS

WIRE ENTRANCE:45° to PCB	TERMINAL:Copper, Tin Plated
CENTER SPACING:3.50mm / 0.138 in	TEMPERATURE:
WIRE RANGE:16--20 AWG	OPERATING:-40°C to +105°C
ELECTRICAL RATING:300V, 5A	-40°F to + 221°F
BREAKDOWN VOLTAGE:4,000V	MAX. SOLDERING:260°C , +500°F
MOLDING:Polyamide, UL94, V-0	for 5 seconds
Self Extinguishing	

MECHANICAL DIMENSIONS

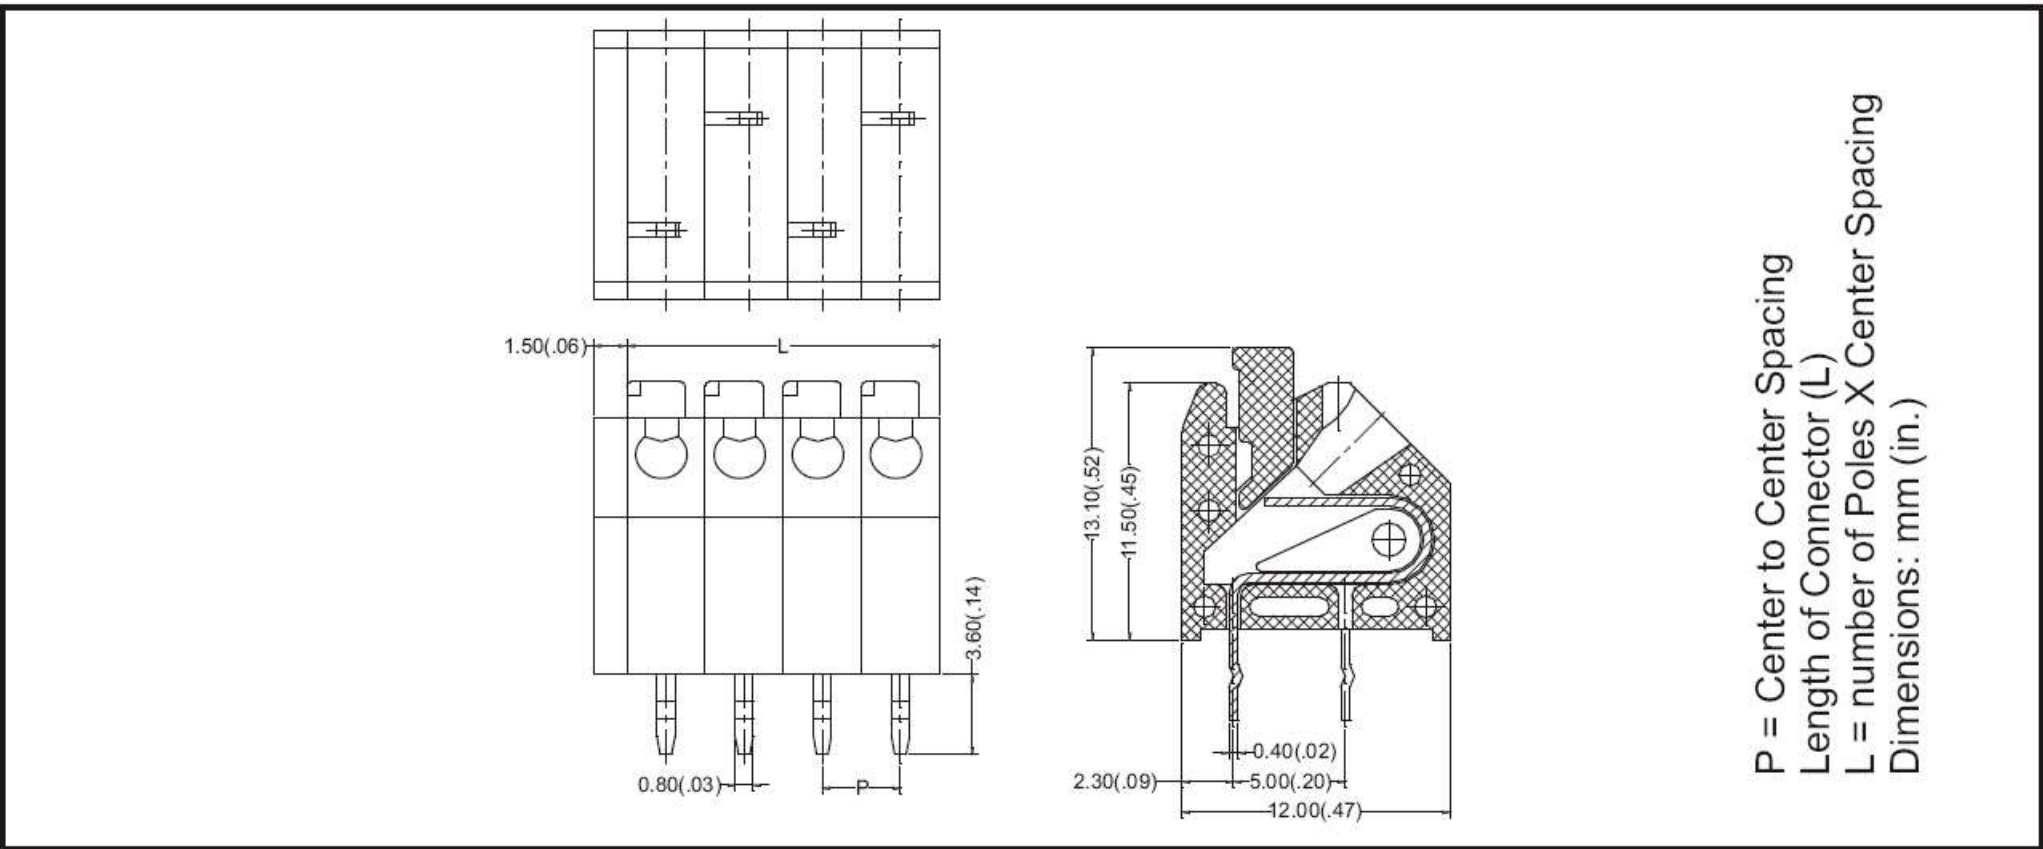

ORDERING INFORMATION

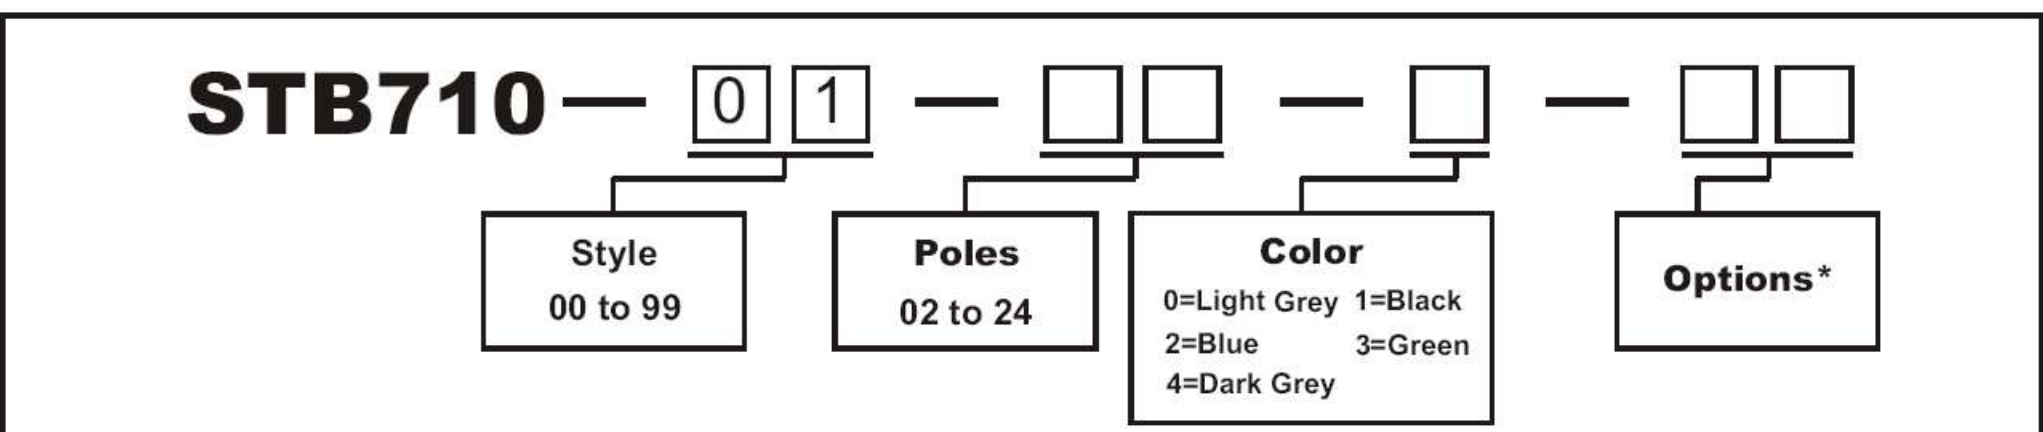

Options*: M1~M9, For Customer Modification (Please provide sketch).
 If more than one option is required, please separate each option with a dash (-).