SPRING
TERMINAL BLOCK

TYPE STB710

SPECIFICATIONS

WIRE ENTRANCE: .....45° to PCB
CENTER SPACING: .....3.50mm / 0.138 in.
WIRE RANGE: .....16--20 AWG
ELECTRICAL RATING: 300V, 5A
BREAKDOWN VOLTAGE: 4,000V
MOLDING: .....Polyamide, UL94, V-0
Self Extinguishing

TERMINAL: .....Copper, Tin Plated
TEMPERATURE:
OPERATING: .....-40°C to +105°C
-40°F to + 221°F
MAX. SOLDERING: .....260°C , +500°F
for 5 seconds

MECHANICAL DIMENSIONS

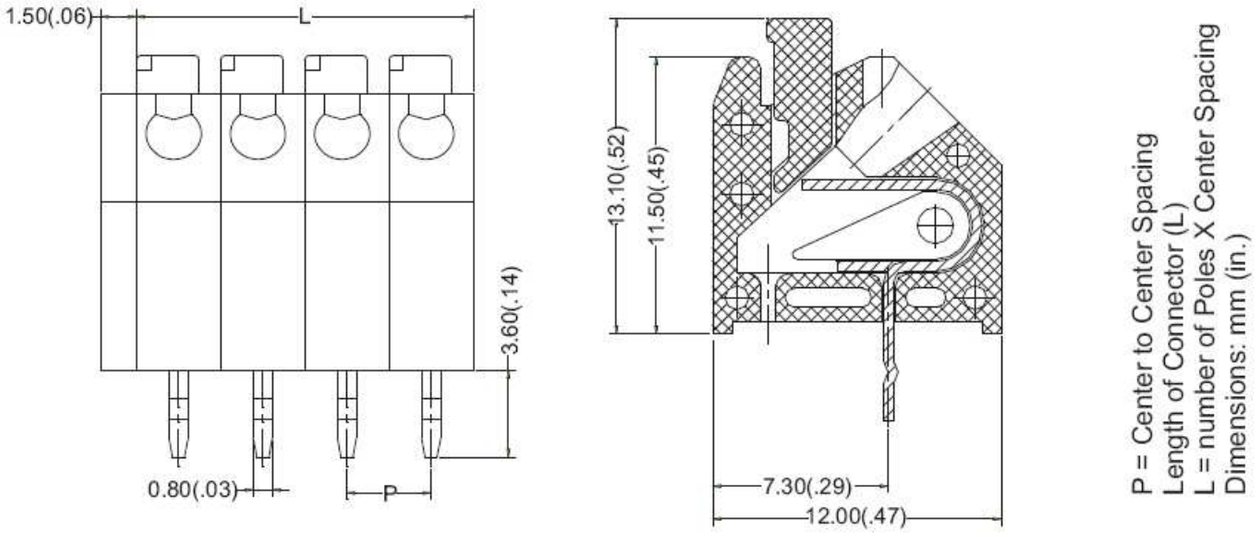

ORDERING INFORMATION

STB710 — 0 2 — □ □ — □ — □ □

Style	Poles	Color	Options*
00 to 99	02 to 24	0=Light Grey 1=Black 2=Blue 3=Green 4=Dark Grey	

Options*: M#, For Customer Modification (Please provide sketch).
If more than one option is required, please separate each option with a dash (-).